


VYNCO

88USBM USB POWER MODULE

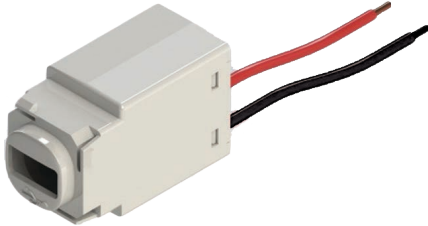

| SPECIFICATIONS | VYNCO 88USBM |
|--------------------------|---|
| Supply Voltage Range | 220-240Va.c. 50Hz |
| Nominal Output Voltage | 5.0 V d.c. +- 5% |
| Nominal Output Current | 2.1A at 5.0V d.c. |
| Standby Power | Less than 1.0mA. |
| Wall Plate compatibility | Fits all common Vynco, Logix, Fusion and Clipsal Wall Plates. Up to 4 USB Modules in a Switch Plate and in the Switch space on extra Switch Sockets. |
| Usage | Charging Portable USB Power Devices only. DO NOT use for Data transmission. |
| Suitable for charging | All USB devices – Tablets, Smartphones, MP3/MP4 Players, e-Readers. |
| Operating temperature | Range 5° – 40°C |
| Humidity | Indoor use only – 15 to 85% Non Condensing |
| Wire Size | 2 x 0.75mm ² |
| Complies With | AS/NZS60950.1 :2011 + A1:2012 |
| Repair | This product does not contain user serviceable parts. |

INSTALLER NOTES

Always turn off the power at the circuit beaker (MCB) to isolate the circuit before wiring or changing the USB Module. The 88USBM must be used in conjunction with an accessible Isolator or MCB.


Suitable for use as a charging device only – DO NOT use for Data Transmission.

Not suitable for charging non USB compatible devices.

All wiring should be carried out by a licensed/registered electrician or similarly qualified person and installed according to the AS/NZS3000 Wiring Rules.

WIRING


88USBM fitted to an extra switch socket

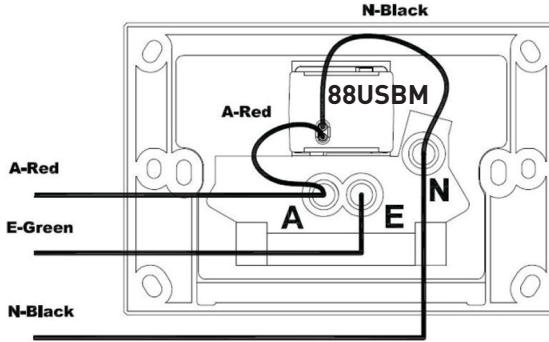

NOTE: Wire socket and USB before inserting USB module into plate

88USBM fitted to a wall plate

NOTE: The 88USBM product must be fitted to a wall plate and installed in a suitable enclosure (mounting block or flush box). The input wires are only intended as internal wiring and should not be accessible in use. The product must be protected by an accessible Isolator or MCB.

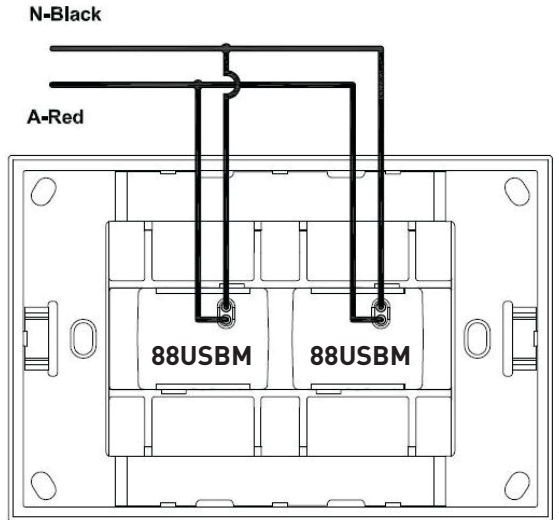

WARRANTY STATEMENT

The 88USBM is guaranteed for a period of 5 years from the date of purchase against defects in workmanship and materials. Defects will be rectified by replacement of the product. This warranty becomes null and void if in our opinion the product has been misused, incorrectly installed, tampered with, or subject to power surges. The warranty does not include any labour or other associated expenses that may be involved in removal or installation of the product. To obtain a replacement under this guarantee, return the goods (prepaid) to the place of purchase (proof of purchase must be supplied).

Vynco Industries (NZ) Ltd

www.vynco.co.nz

Christchurch

PO Box 9022, Tower Junction
Christchurch 8149
388 – 396 Tuam Street, Christchurch, 8011
P +64 3 379 9283 F +64 3 379 6838
E chchsales@vynco.co.nz

Northern Region / Auckland

PO Box 12 249
58 Walls Road, Penrose
Auckland 1061
P +64 9 525 6051 F +64 9 525 5799
E vyncoauck@vynco.co.nz