
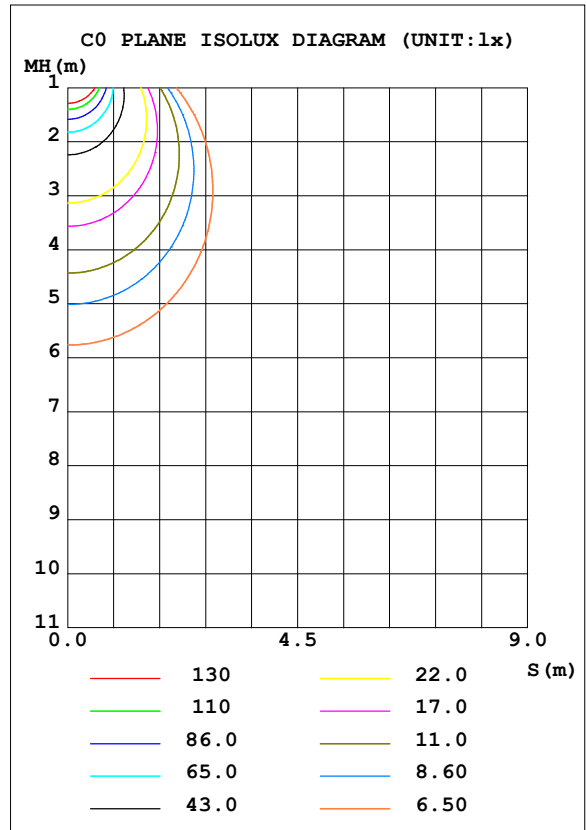


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0% Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.059	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 116.32 lm/W			
MODEIAL117-11-6W-A3C3-4000K		I <sub>max</sub> (cd)	216.0	S/MH (C0/180)	1.26
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	658.62	η UP, DN (C0-180)	1.1, 49.8
NOMINAL FLUX (lm)	658.618	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.0, 48.2
LAMPS INSIDE	1	η up (%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	97.9	CIBSE SHR MAX	1.35

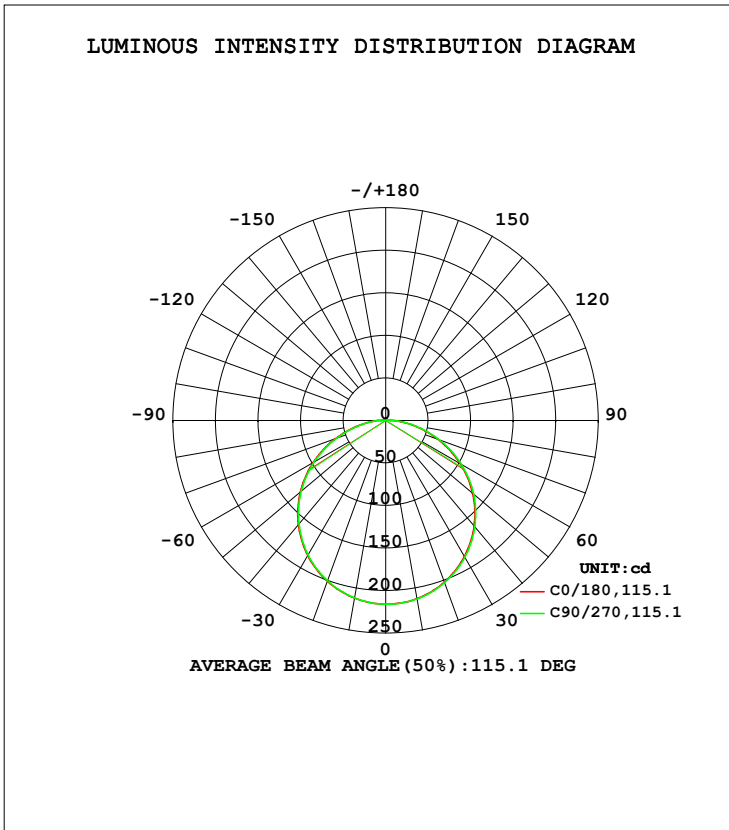

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.692m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C90	C180	C270				$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	212.6	213.0	212.0	211.7				0- 10	20.44	20.44	3.1,3.1
20	202.0	202.8	201.0	200.4				10- 20	58.66	79.10	12,12
30	184.9	185.9	183.3	182.5				20- 30	89.26	168.4	25.6,25.6
40	161.8	163.1	159.8	158.7				30- 40	108.3	276.7	42,42
50	133.4	135.0	131.1	129.7				40- 50	113.5	390.2	59.2,59.2
60	100.9	102.7	98.33	96.83				50- 60	104.0	494.3	75,75
70	65.62	67.57	63.10	61.53				60- 70	81.29	575.6	87.4,87.4
80	31.84	33.58	29.65	28.39				70- 80	49.85	625.4	95,95
90	7.843	9.537	7.038	7.427				80- 90	19.49	644.9	97.9,97.9
100	3.206	2.816	2.711	3.327				90-100	5.494	650.4	98.8,98.8
110	2.328	1.381	0.7641	1.079				100-110	2.131	652.5	99.1,99.1
120	1.482	1.196	1.463	1.351				110-120	1.428	653.9	99.3,99.3
130	1.244	1.500	1.202	1.309				120-130	1.093	655.0	99.5,99.5
140	1.688	1.783	1.635	1.713				130-140	1.178	656.2	99.6,99.6
150	1.682	1.669	1.641	1.488				140-150	1.054	657.3	99.8,99.8
160	1.546	1.630	1.540	1.576				150-160	0.7327	658.0	99.9,99.9
170	1.640	1.660	1.635	1.625				160-170	0.4563	658.5	100,100
180	1.700	1.683	1.694	1.683				170-180	0.1583	658.6	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT: lm		

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0%			Lamp Flux:658.618x1 lm
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:	
SPEC.: 4000K	DIM.:	SERIAL No.: 1	
MFR.:	SUR.: 0.059	Shielding Angle:	

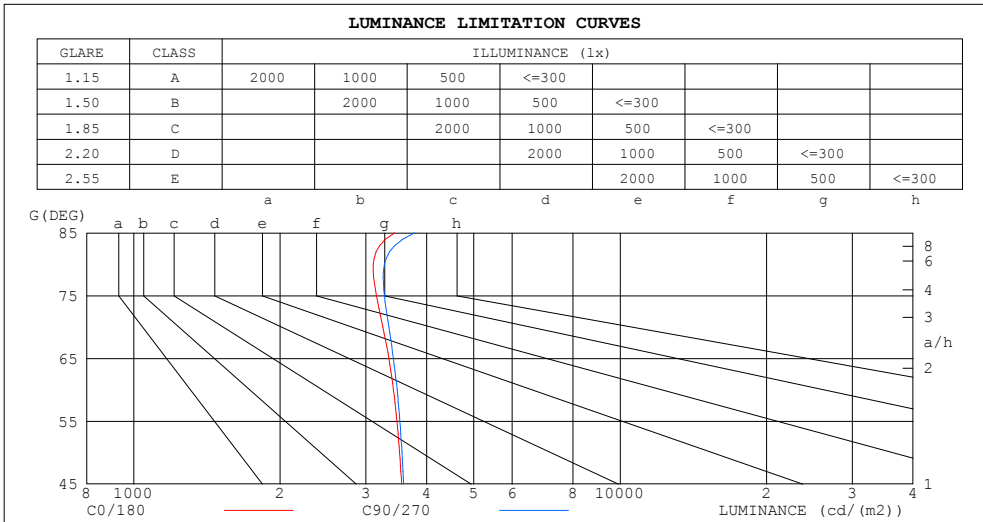

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3440	3780
80	3109	3277
75	3153	3275
70	3253	3347
65	3347	3418
60	3421	3479
55	3478	3525
50	3520	3560
45	3555	3585


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0% Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.059	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.98	.94	1.00	.96	.92	.95	.92	.89	.91	.88	.86	.87	.85	.83	.81
2.0	.89	.82	.76	.87	.80	.75	.83	.78	.73	.79	.75	.71	.76	.72	.69	.67
3.0	.78	.70	.63	.76	.68	.62	.73	.66	.61	.70	.64	.59	.67	.62	.58	.56
4.0	.69	.60	.53	.67	.59	.53	.65	.57	.52	.62	.56	.51	.60	.54	.50	.47
5.0	.61	.52	.45	.60	.52	.45	.58	.50	.44	.56	.49	.44	.53	.48	.43	.41
6.0	.55	.46	.40	.54	.46	.39	.52	.44	.39	.50	.43	.38	.48	.42	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.46	.39	.34	.44	.38	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.41	.34	.30	.28
9.0	.42	.33	.28	.41	.33	.28	.40	.33	.27	.39	.32	.27	.37	.31	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.24	.23

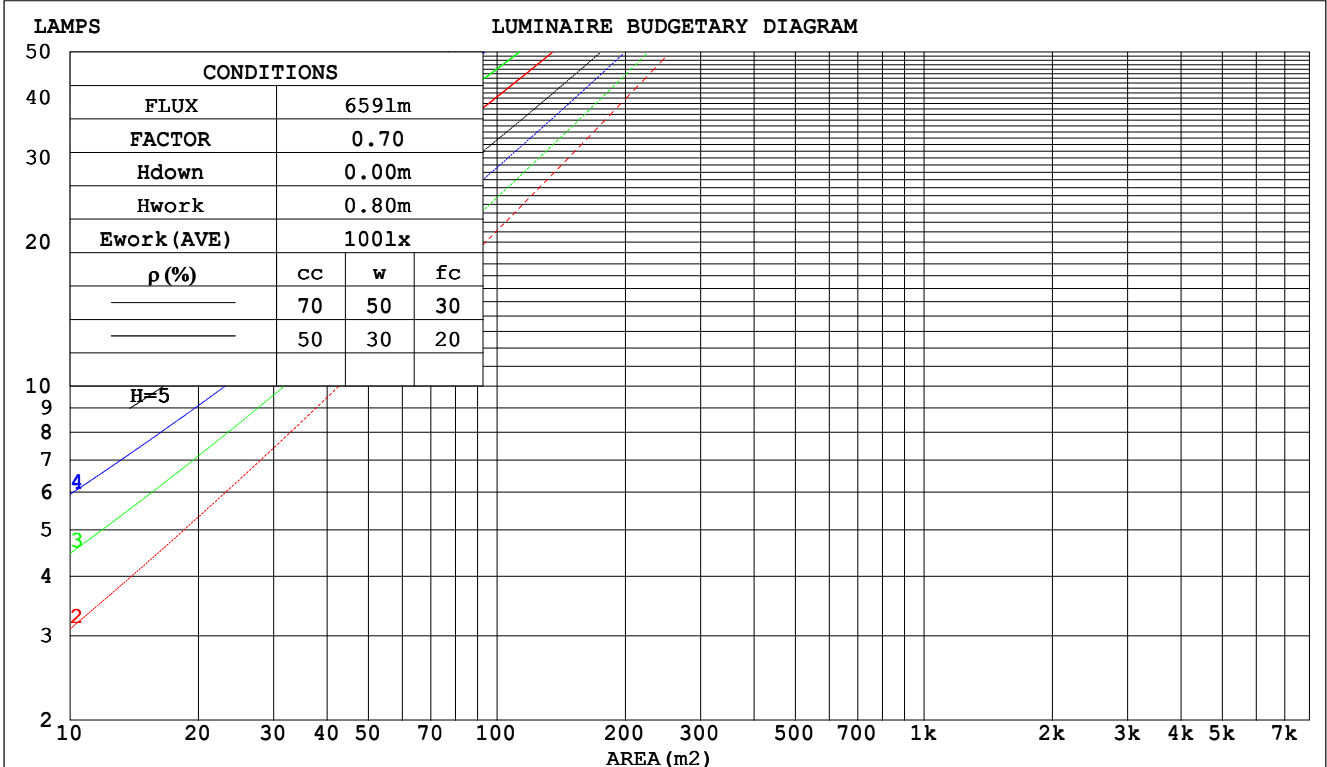

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0%			Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K		TYPE: 6W		WEIGHT:	
SPEC.: 4000K		DIM.:		SERIAL No.: 1	
MFR.:		SUR.: 0.059		Shielding Angle:	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.325	.185	.059	.317	.181	.057	.303	.174	.055	.289	.167	.054	.277	.161	.052	
2.0	.301	.165	.051	.294	.162	.050	.281	.156	.049	.269	.151	.047	.258	.146	.046	
3.0	.276	.147	.044	.270	.145	.044	.258	.140	.043	.248	.136	.042	.238	.132	.041	
4.0	.253	.132	.039	.248	.130	.038	.238	.126	.038	.228	.123	.037	.220	.119	.036	
5.0	.233	.119	.034	.229	.117	.034	.220	.114	.034	.211	.111	.033	.203	.109	.033	
6.0	.216	.108	.031	.212	.107	.031	.204	.104	.030	.196	.102	.030	.189	.099	.030	
7.0	.201	.099	.028	.197	.098	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	
8.0	.187	.091	.026	.184	.090	.026	.177	.088	.025	.171	.087	.025	.165	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.166	.082	.023	.161	.080	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.156	.077	.022	.151	.075	.021	.146	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.197	.172	.149	.169	.148	.128	.116	.102	.089	.066	.059	.052	.021	.019	.017	
2.0	.190	.148	.113	.162	.127	.098	.111	.088	.068	.064	.051	.040	.021	.017	.013	
3.0	.182	.131	.090	.156	.113	.078	.107	.078	.055	.062	.046	.032	.020	.015	.011	
4.0	.174	.117	.074	.149	.101	.064	.103	.071	.045	.059	.041	.027	.019	.013	.009	
5.0	.167	.107	.063	.143	.093	.055	.099	.065	.039	.057	.038	.023	.018	.012	.008	
6.0	.159	.099	.055	.137	.086	.048	.095	.060	.034	.055	.035	.020	.018	.012	.007	
7.0	.153	.092	.049	.131	.080	.043	.091	.056	.030	.053	.033	.018	.017	.011	.006	
8.0	.146	.086	.045	.126	.075	.039	.087	.052	.028	.051	.031	.017	.016	.010	.005	
9.0	.140	.081	.042	.120	.070	.036	.083	.050	.026	.049	.029	.015	.016	.010	.005	
10.0	.134	.077	.039	.116	.067	.034	.080	.047	.024	.047	.028	.014	.015	.009	.005	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0%			Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K		TYPE: 6W		WEIGHT:	
SPEC.: 4000K		DIM.:		SERIAL No.: 1	
MFR.:		SUR.: 0.059		Shielding Angle:	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.1	18.7	17.4	18.9	19.2	17.2	18.7	17.5	19.0	19.2
3H	18.8	20.2	19.1	20.5	20.7	18.9	20.3	19.2	20.5	20.8
4H	19.5	20.8	19.8	21.1	21.4	19.6	20.9	19.9	21.2	21.5
6H	20.0	21.3	20.4	21.6	21.9	20.2	21.4	20.5	21.8	22.1
8H	20.3	21.5	20.6	21.8	22.1	20.4	21.6	20.8	22.0	22.3
12H	20.4	21.6	20.8	21.9	22.3	20.6	21.8	21.0	22.1	22.5
4H 2H	17.8	19.1	18.1	19.4	19.7	17.8	19.2	18.2	19.5	19.8
3H	19.6	20.8	20.0	21.1	21.5	19.7	20.9	20.1	21.2	21.6
4H	20.4	21.5	20.9	21.9	22.3	20.5	21.6	21.0	22.0	22.4
6H	21.2	22.1	21.6	22.5	22.9	21.3	22.2	21.7	22.6	23.0
8H	21.4	22.3	21.9	22.7	23.2	21.6	22.5	22.0	22.9	23.3
12H	21.7	22.5	22.2	22.9	23.4	21.9	22.7	22.3	23.1	23.6
8H 4H	20.8	21.7	21.2	22.1	22.5	20.9	21.7	21.3	22.2	22.6
6H	21.7	22.4	22.1	22.8	23.3	21.8	22.5	22.3	23.0	23.4
8H	22.1	22.7	22.6	23.2	23.7	22.2	22.9	22.7	23.3	23.8
12H	22.5	23.0	23.0	23.5	24.0	22.6	23.2	23.1	23.7	24.2
12H 4H	20.8	21.6	21.3	22.0	22.5	20.9	21.7	21.3	22.1	22.6
6H	21.8	22.4	22.3	22.9	23.4	21.9	22.5	22.4	23.0	23.5
8H	22.2	22.8	22.7	23.3	23.8	22.4	22.9	22.9	23.4	23.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 658.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.5)  
 Area: 0.059 m2

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0%			Lamp Flux:658.618x1 lm
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:	
SPEC.: 4000K	DIM.:	SERIAL No.: 1	
MFR.:	SUR.: 0.059	Shielding Angle:	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	54	46	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	80	70	63	77	68	62	54
1.50	86	76	69	85	75	68	81	73	67	59
2.00	93	84	78	91	83	77	88	81	75	67
2.50	97	89	83	95	88	82	91	85	80	71
3.00	101	93	88	98	92	86	94	89	84	75
4.00	105	99	94	102	97	92	98	93	89	80
5.00	107	102	98	105	100	96	100	96	93	83
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0% Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.059	Shielding Angle:

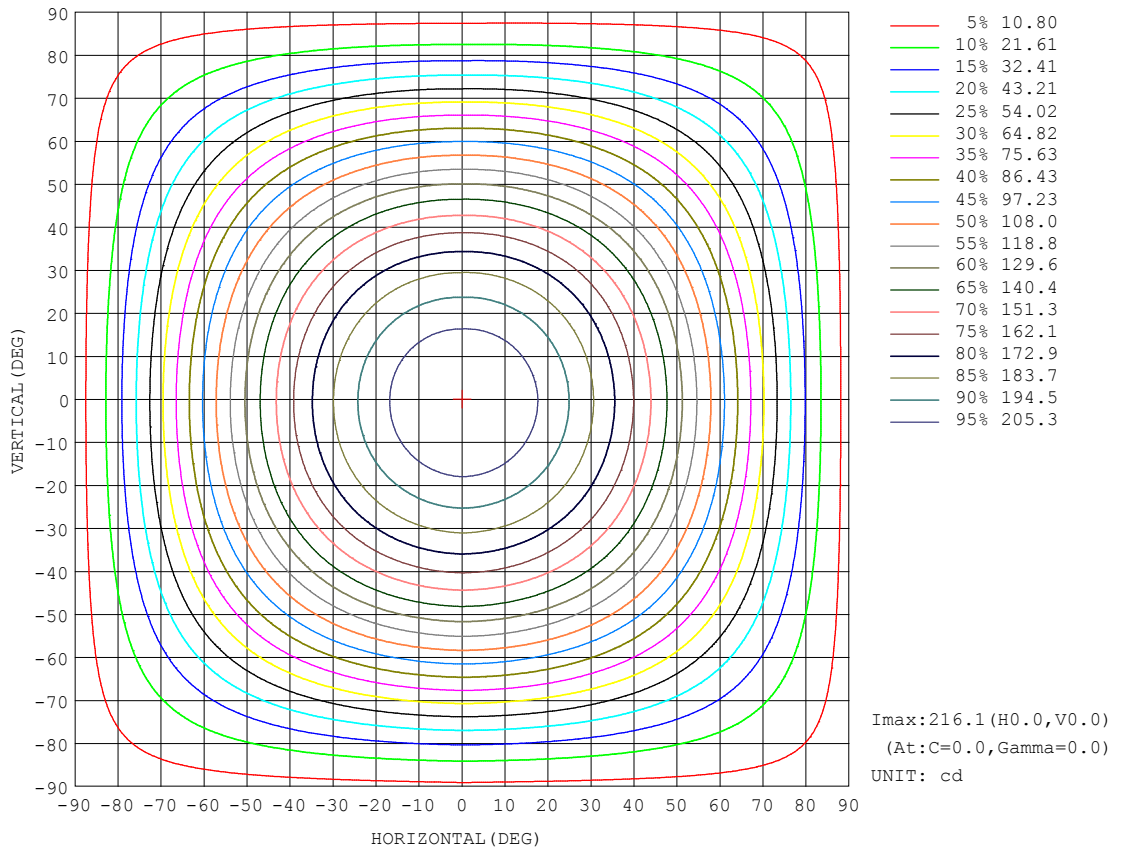


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0% Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.059	Shielding Angle:

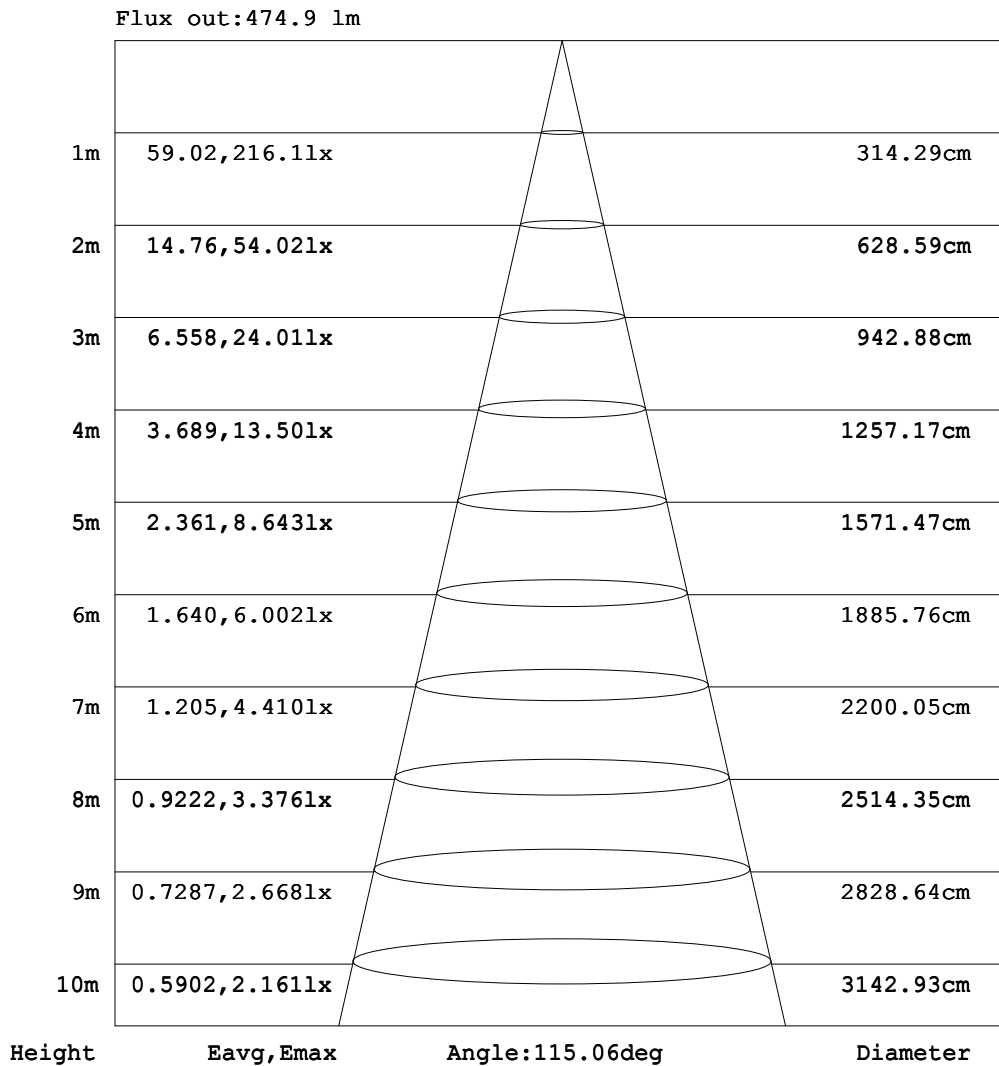


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0% Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.059	Shielding Angle:

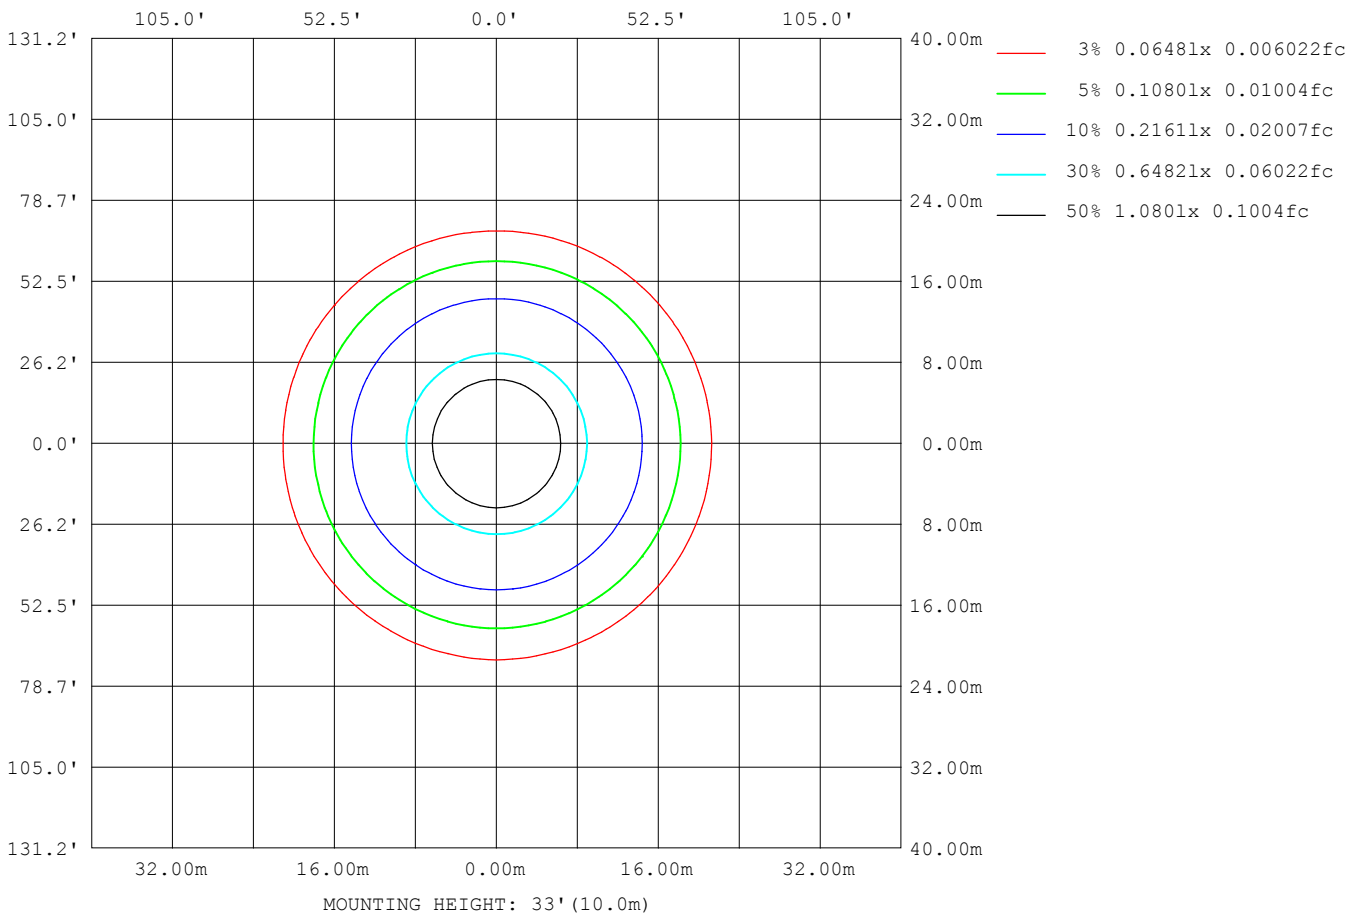

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

LED Avg.L Report

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0% Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.059	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3293
L_0~180 (75) av	3074
L_0~180 (85) av	3282
L_90~270 (65) av	3299
L_90~270 (75) av	3087
L_90~270 (85) av	3387
L_45 (65) av	3294
L_45 (75) av	3077
L_45 (85) av	3337

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

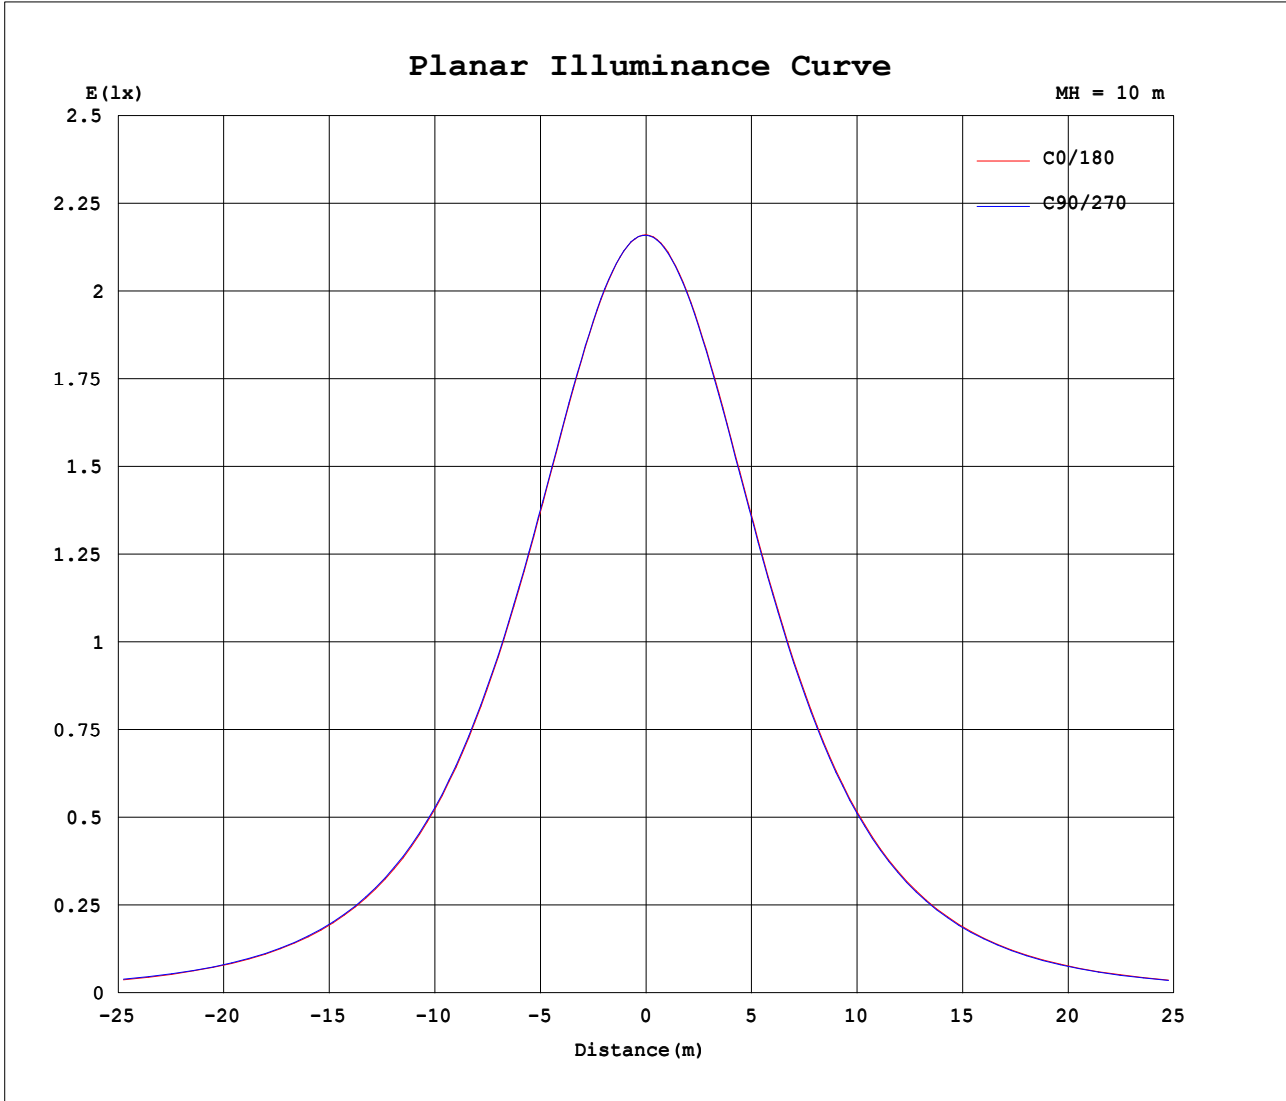

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.18V I:0.0318A P:5.6621W PF:0.7732 Freq:49.99Hz UTHDi:0% ITHDi:0% Lamp Flux:658.618x1 lm		
NAME: AL117-11-6W-A3C3-4000K	TYPE: 6W	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 1
MFR.:	SUR.: 0.059	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	216	216	216	216															
5	215	215	215	215															
10	213	213	212	212															
15	208	209	207	207															
20	202	203	201	200															
25	194	195	193	192															
30	185	186	183	182															
35	174	175	172	171															
40	162	163	160	159															
45	148	150	146	145															
50	133	135	131	130															
55	118	119	115	114															
60	101	103	98.3	96.8															
65	83.4	85.3	80.8	79.3															
70	65.6	67.6	63.1	61.5															
75	48.1	50.0	45.8	44.3															
80	31.8	33.6	29.6	28.4															
85	17.7	19.4	16.1	15.4															
90	7.84	9.54	7.04	7.43															
95	4.86	5.60	4.36	4.86															
100	3.21	2.82	2.71	3.33															
105	2.52	1.25	1.95	1.98															
110	2.33	1.38	0.76	1.08															
115	1.97	1.56	1.13	1.17															
120	1.48	1.20	1.46	1.35															
125	1.10	1.24	1.04	1.15															
130	1.24	1.50	1.20	1.31															
135	1.43	1.84	1.38	1.51															
140	1.69	1.78	1.63	1.71															
145	1.71	1.73	1.64	1.65															
150	1.68	1.67	1.64	1.49															
155	1.61	1.64	1.56	1.50															
160	1.55	1.63	1.54	1.58															
165	1.63	1.62	1.59	1.60															
170	1.64	1.66	1.63	1.62															
175	1.67	1.68	1.66	1.65															
180	1.70	1.68	1.69	1.68															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2020-10-29

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.692m [K=1.0000]  
 Remarks: