VYNCO

INSTALLATION INSTRUCTIONS

INDUSTRY CV SWITCHSOCKETS IP66

VICV310 - 315 SERIES

Code	Pins	Current rating (A)	Voltage (V)
VICV310	3 Flat	10	250V a.c.
VICV315	3 Flat	15	250V a.c.

SAFETY

Please read all instructions prior to wiring and use of this product.

This product complies in full with the relevant AS/NZS standards.

Always ensure power is switched off/isolated on circuit before installation, internal cleaning or maintenance.

This product contains NO user serviceable parts.

Do not attempt to modify this fitting in any way.

This product should be wired up by a suitably qualified person in accordance with Australian and New Zealand wiring rules AS/NZS 3000.

CLEANING INSTRUCTIONS

To maintain the durability and longevity of the product, neutral based chemicals are best suited.

WARRANTY

The warranty protects against defects in workmanship and material. Any defects will be rectified by replacement if the goods are returned to place of purchase, with proof of purchase, and with a brief explanation of the experienced fault.

The warranty does not include compensation for any associated expenses involving installations or removal, such as labour or travel.

The warranty becomes null and void if, in our opinion, the product has been misused, tampered with, incorrectly installed, or subjected to power surges.

Suitable for indoor & exposed outdoor use.

For all other specifications for the INDUSTRY range, refer to our website, www.vynco.co.nz

VYNCO INDUSTRIES (NZ) LIMITED

CHRISTCHURCH
388 Tuam Street, Phillipstown, Christchurch, 8011
PO Box 9022, Tower Junction, Christchurch 8149
New Zealand
P +64 3 379 9283 F +64 3 379 6838
E sales@vynco.co.nz

AUCKLAND
9 Levene Place, Mount Wellington
PO Box 12 249, Penrose, Auckland 1061
New Zealand
P +64 9 525 6051 F +64 9 525 5799

VYNCO.CO.NZ

VYNCO

INSTALLATION INSTRUCTIONS

INDUSTRY CV SWITCHSOCKETS IP66

VICV310 - 315 SERIES

INSTALLATION INSTRUCTIONS

Wiring must be terminated securely.
Recommended strip length is 10mm to 15mm
Maximum terminal screw torque is 1.5Nm

This product is designed to be fitted to a shallow or deep enclosure. Recommended corner screw fixing torque is 0.6Nm.

Screw covers must be fitted once corner screws are tightened to achieve IP rating.

Use only neutral cure sealant that is suitable for use with polycarbonate plastics. When using any sealant, apply according to the manufacturer's instructions.

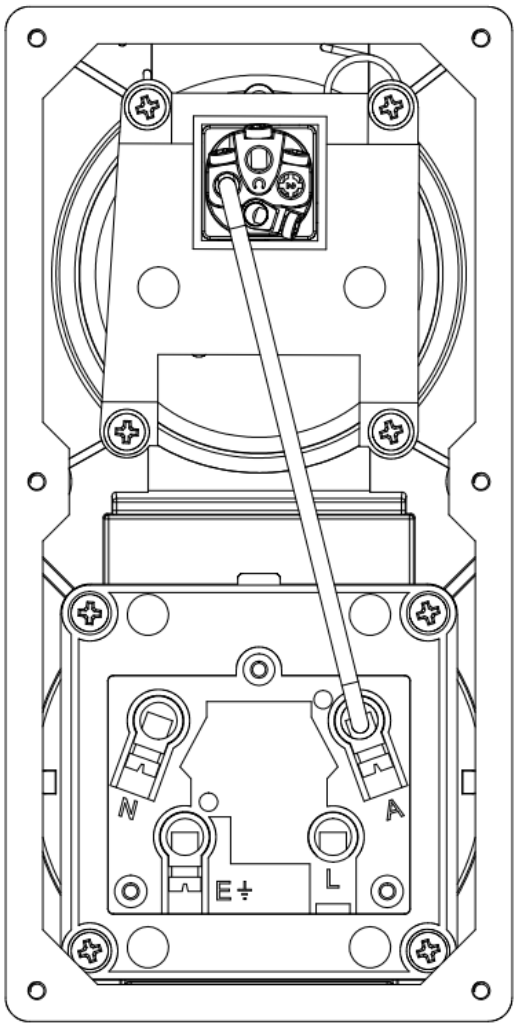

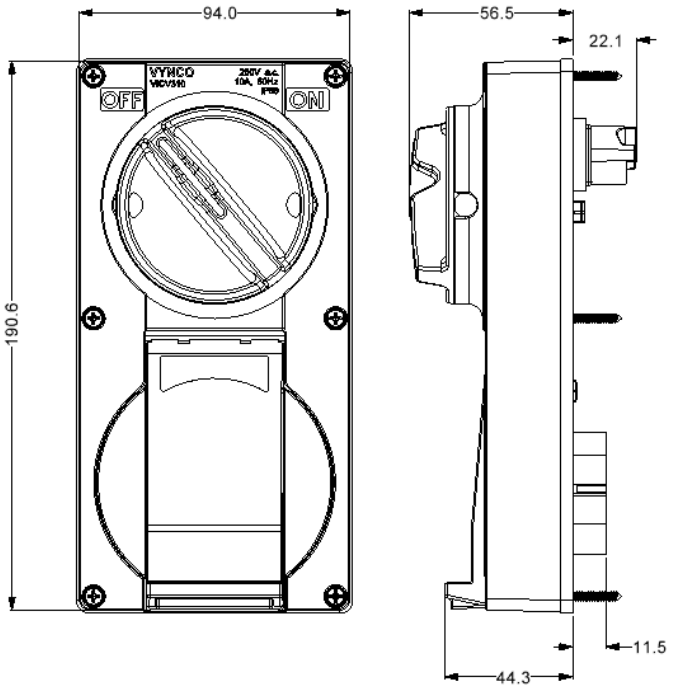

VYNCO INDUSTRIES (NZ) LIMITED

CHRISTCHURCH
388 Tuam Street, Phillipstown, Christchurch, 8011
PO Box 9022, Tower Junction, Christchurch 8149
New Zealand
P +64 3 379 9283 F +64 3 379 6838
E sales@vynco.co.nz

AUCKLAND
9 Levene Place, Mount Wellington
PO Box 12 249, Penrose, Auckland 1061
New Zealand
P +64 9 525 6051 F +64 9 525 5799

VYNCO.CO.NZ

VYNCO

INSTALLATION INSTRUCTIONS

INDUSTRY CV SWITCHSOCKETS IP66

VICV310 - 315 SERIES

VYNCO INDUSTRIES (NZ) LIMITED

CHRISTCHURCH
388 Tuam Street, Phillipstown, Christchurch, 8011
PO Box 9022, Tower Junction, Christchurch 8149
New Zealand
P +64 3 379 9283 F +64 3 379 6838
E sales@vynco.co.nz
VYNCO.CO.NZ

AUCKLAND
9 Levene Place, Mount Wellington
PO Box 12 249, Penrose, Auckland 1061
New Zealand
P +64 9 525 6051 F +64 9 525 5799