

STREEP

COLOUR CHANGING COMMERCIAL
LED DOWNLIGHT RANGE




PRODUCT SPECIFICATION

CODE	TOTAL POWER (W)	LUMENS OUTPUT (lm)	COLOUR TEMPERATURE	EFFICACY (LM/W)	COLOUR
VM5*	10	1100	3000	110	White
		1130	4500	113	White
		1160	5700	116	White
VM6	12	1250	3000	104	White
		1290	4500	107	White
		1330	5700	110	White
VM8	16	1650	3000	103	White
		1700	4000	106	White
		1750	5700	109	White
VM10	21	Coming Soon!			


COMMON SPECIFICATION

Power Factor	0.963	Materials/Construction	Die casting and PC
Input Voltage	220.2V	LED Chip	Seoul
Beam Angle	75°*/80°	Driver Make	Gama
Glare Rating	<19	Operating Temperature	0°C ~ +45°C
Colour Rendering	90	Dimming	On Request
IP Rating	IP54	Projected Life (hrs)	50,000
IK Rating	IK03	Class	II



CERTIFICATES & APPROVALS



DIMENSIONS

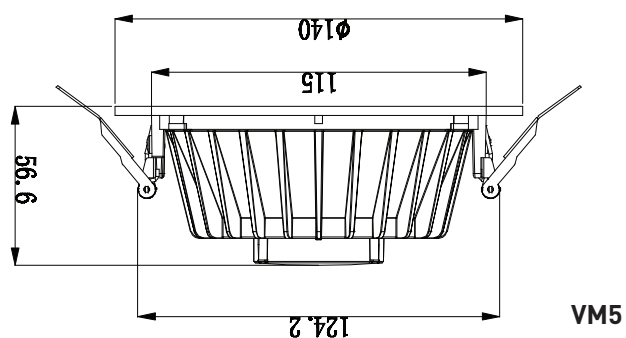


CODE	FASCIA (mm)	HEIGHT (mm)	CUT OUT (mm)
VM5	140	56.6	125
VM6	165	48.7	150
VM8	193	54.2	180
VM10	Coming Soon!		

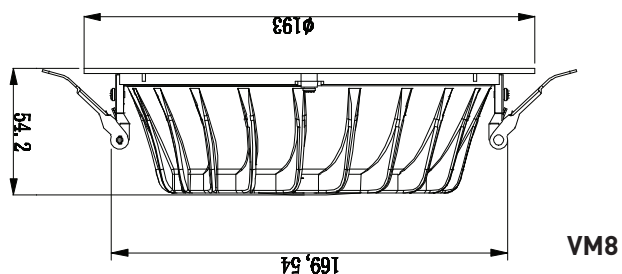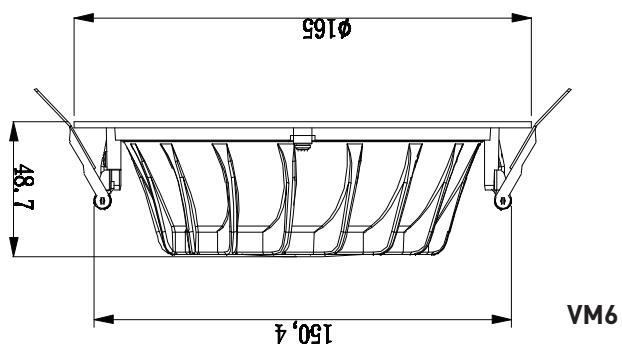


PHOTOMETRICS


VM5 3000K

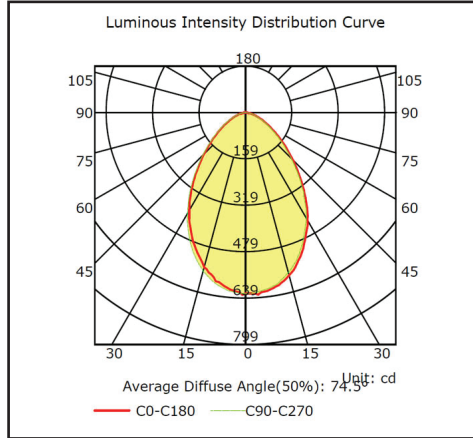


VM5 4000K

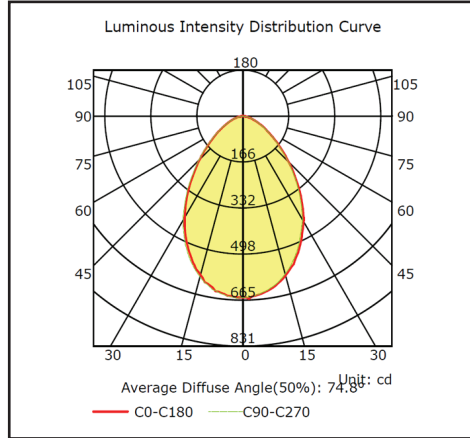


VM5 5700K

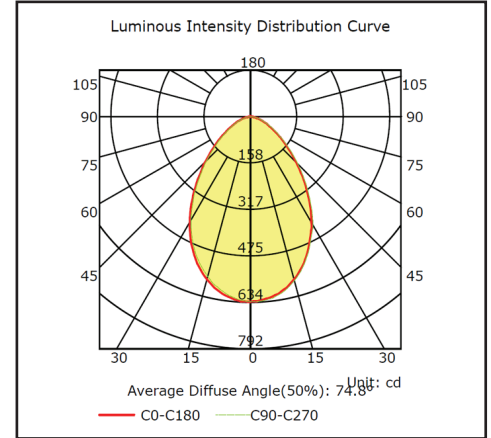


VM6 3000K

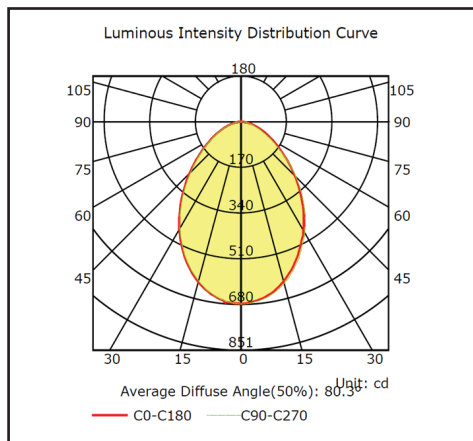


VM6 4000K

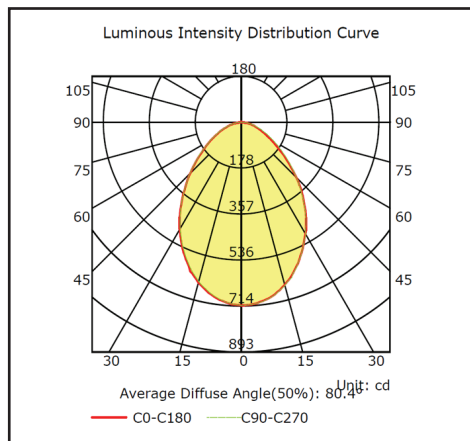


VM6 5700K

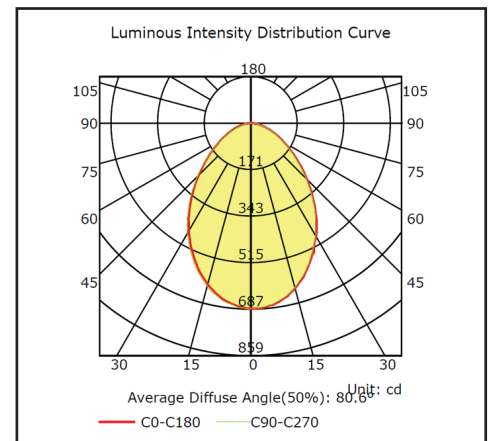

VM8 3000K

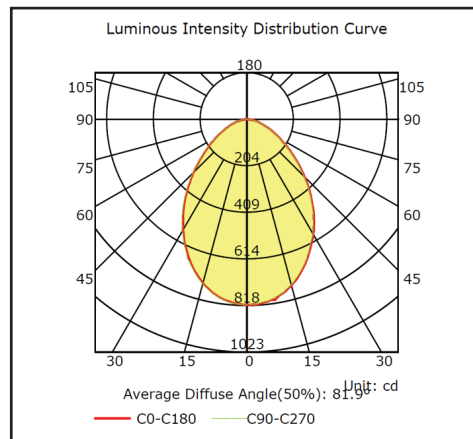

VM8 4000K

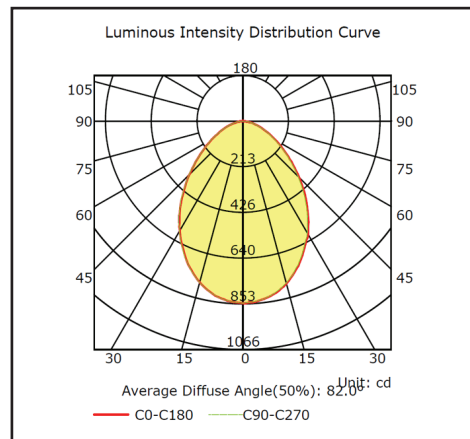

VM8 5700K

