




# METRO RCD PROTECTED SWITCH SOCKET

### FEATURES

- RCD Protected Socket
- 10mA or 30mA Rated Trip Current
- Matt White Finish

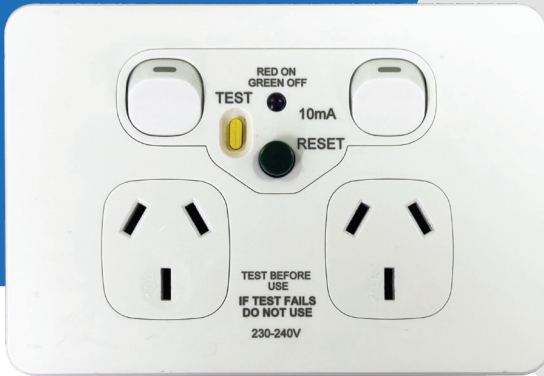

	CODE	MP2HR10	MP2HR30
Socket Specification	Rated Voltage	250V A.C.	
	Rated Frequency	50Hz	
	Max Operating Current	10A	
	Number of Sockets	2	
RCD Module Specification	Rated Trip Current	10mA	30mA
	Rated Voltage	230-240V A.C.	
	Rated Frequency	50Hz	
	Rated Current	20A (RCD protected circuit)	
	Short Circuit Breaking Capacity	3kA with 20A HRC fuse	
	Colour	White	
	Finish	Matt	
	Material	Polycarbonate	
	IP Rating	IP30	
	Operational Temperature	-5° - +40°	
	Overall Dimensions (H x W x D)	120 x 82 x 45mm	
	Complies With	AS/NZS 3112, AS/NZS 3190	