

VYNCO LIGHTING



COVERS EXISTING
CEILING DAMAGE OR
IMPERFECTIONS

COMPLETE INDOOR OUTDOOR LED BATTEN SOLUTION

OUTDOOR

- Opal polycarbonate cover and ABS body
- Long life - 35,000 hours operation
- High colour rendering - in excess of CRI:75
- Suitable for ceiling or wall mounting and suspending
- Weatherproof - IP65

INDOOR

- Prepainted formed 0.5mm cold rolled steel housing.
- Long life - 50,000 hours operation
- High-diffusion Milky PC Diffuser - Matte White finish
- Centre terminal connection
- High colour rendering - in excess of CRI:80
- Indoor suitable - IP20



INDOOR LED BATTEN




STANDARD UNITS

Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Colour
B1224	50	5000	4000	1200 x 200	White
B1524	70	7000	4000	1500 x 200	White



MAKE GOOD

Easily cover pre-existing damage with 200mm of fitting width.

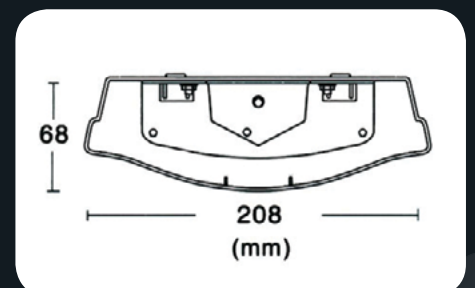



OUTDOOR LED BATTEN

STANDARD UNITS

Code	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Colour
VLWLED2	24	1920	4000	658 x 158	Grey/White
VLWLED4	45	3600	4000	1268 x 158	Grey/White
VLWLED5	64	5120	4000	1568 x 158	Grey/White
VLWLED56	64	5300	6000	1568 x 158	Grey/White

SENSOR

- 360° detection angle
- 1-8m Detection range
- Time setting range: 10 sec – 10 min
- Light control: 10-2000 Lux

EMERGENCY

- 3 Hour Emergency Operation
- Recharge time: 20 Hours
- Intelligent automatic recharge function
- Test switch with self-test function

INDOOR SPECIALTY UNITS

Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Colour
B1224E	Emergency	50	5000	4000	1200 x 200	White
B1224S	Sensing	50	5000	4000	1200 x 200	White
B1224ES	Emergency & Sensing	50	5000	4000	1200 x 200	White
B1524E	Emergency	70	7000	4000	1500 x 200	White
B1524S	Sensing	70	7000	4000	1500 x 200	White
B1524ES	Emergency & Sensing	70	7000	4000	1500 x 200	White

OUTDOOR SPECIALTY UNITS

Code	Type	Power (W)	Lumens Output	Colour Temp (k)	Dimensions (mm)	Colour
VLWLED4E	Emergency	45	3600	4000	1268 x 158	Grey/White
VLWLED4S	Sensing	45	3600	4000	1268 x 158	Grey/White
VLWLED4ES	Emergency & Sensing	45	3600	4000	1268 x 158	Grey/White
VLWLED5E	Emergency	64	5120	4000	1568 x 158	Grey/White
VLWLED5S	Sensing	64	5120	4000	1568 x 158	Grey/White
VLWLED5ES	Emergency & Sensing	64	5120	4000	1568 x 158	Grey/White
VLWLED56E	Emergency	64	5300	6000	1568 x 158	Grey/White
VLWLED56S	Sensing	64	5300	6000	1568 x 158	Grey/White
VLWLED56ES	Emergency & Sensing	64	5300	6000	1568 x 158	Grey/White

VYNCO LIGHTING

WWW.VYNCO-LIGHTING.CO.NZ

Christchurch Office

388-396 Tuam Street, Phillipstown, Christchurch 8011
PO Box 9022, Tower Junction, Christchurch 8149
New Zealand
P (+64) 3 379 9283 F (+64) 3 379 6838
E chchsales@vynco.co.nz

Auckland Office

58 Walls Road, Penrose, Auckland 1061
PO Box 12 249, Penrose, Auckland 1642
New Zealand
P (+64) 9 525 6051 F (+64) 9 525 5799
E vyncoauck@vynco.co.nz