




V0122 / CRAWFORD ROUND COLOUR CHANGE OYSTER



FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Double Insulated
- 3 Year Warranty

Luminous Intensity Distribution Diagrams

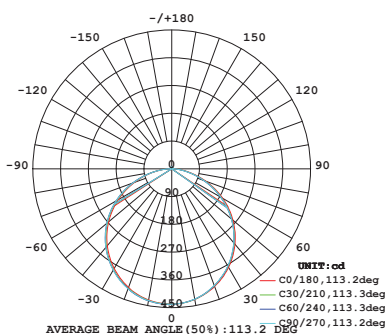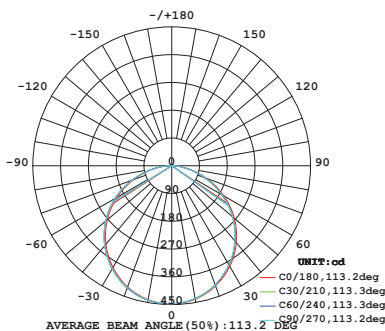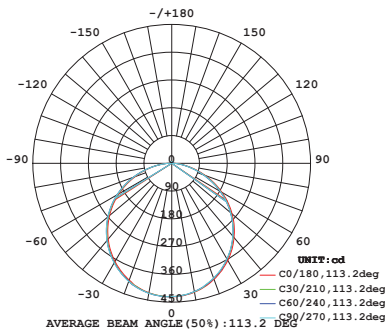

V0122	
Efficacy	90lm/W
Lumen Output	1000-1070lm
Power	12W
IP Rating	IP54
UGR	>19
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	Polycarbonate
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
ICF/ IC-4 Tested	N/A
Beam Angle	120°
Approvals & Certificates	SAA / LM80
LED Lifetime	40,000hrs
FITTING DIMENSIONS	
Diameter	Ø 250mm
Depth	54mm


V0183 / CRAWFORD ROUND COLOUR CHANGE OYSTER




FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Double Insulated
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

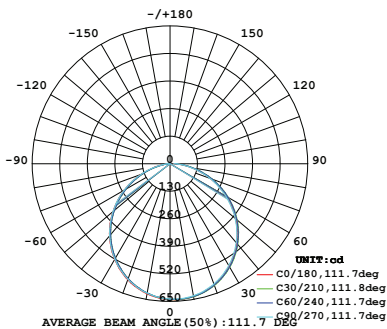

V0183 (3000K)

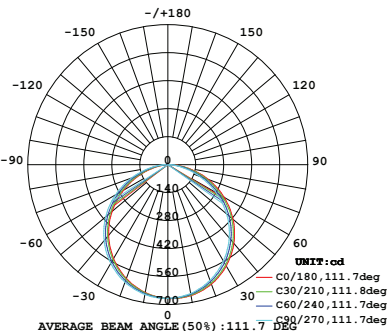

V0183 (4000K)

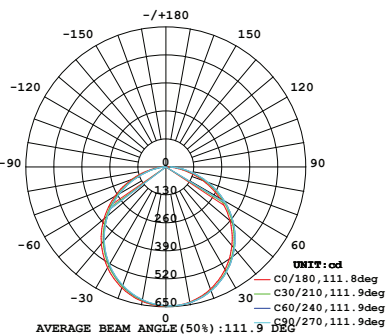

V0183 (5700K)

V0183

Efficacy	100lm/W
Lumen Output	1760-1900lm
Power	18W
IP Rating	IP54
UGR	>19
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	Polycarbonate
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
ICF/ IC-4 Tested	N/A
Beam Angle	120°
Approvals & Certificates	SAA / LM80
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 300mm
Depth	54mm


V0253 / CRAWFORD ROUND COLOUR CHANGE OYSTER




FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Double Insulated
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

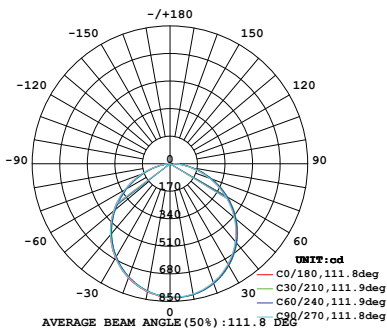

V0253 (3000K)

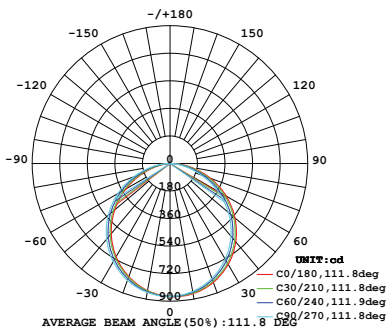

V0253 (4000K)

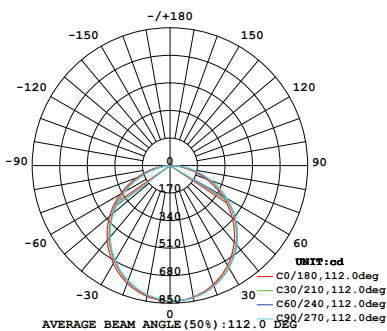

V0253 (5700K)

V0253	
Efficacy	100lm/W
Lumen Output	2320-2470lm
Power	25W
IP Rating	IP54
UGR	>19
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	Polycarbonate
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
ICF/ IC-4 Tested	N/A
Beam Angle	120°
Approvals & Certificates	SAA / LM80
LED Lifetime	40,000hrs

FITTING DIMENSIONS	
Diameter	Ø 300mm
Depth	54mm


V0304 / CRAWFORD ROUND COLOUR CHANGE OYSTER




FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Double Insulated
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

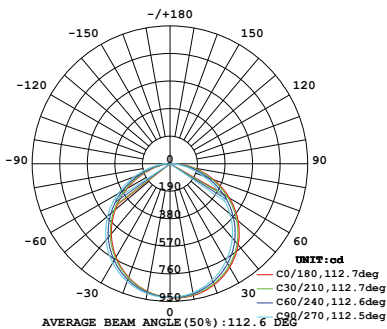

V0304 (3000K)

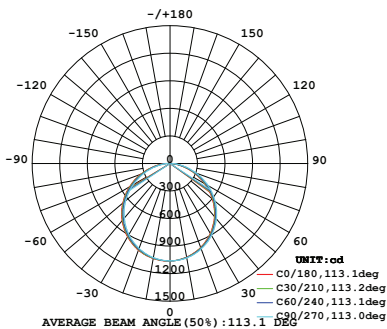

V0304 (4000K)

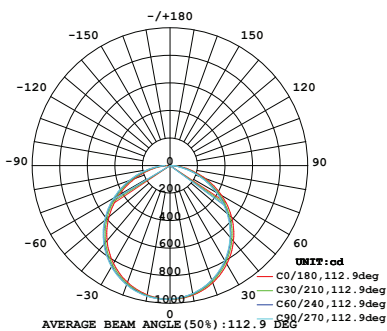


V0304 (5700K)

V0304	
Efficacy	100lm/W
Lumen Output	2700-3000lm
Power	30W
IP Rating	IP54
UGR	>19
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	Polycarbonate
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
ICF/ IC-4 Tested	N/A
Beam Angle	120°
Approvals & Certificates	SAA / LM80
LED Lifetime	40,000hrs
FITTING DIMENSIONS	
Diameter	Ø 400mm
Depth	60mm


VOS1225 / CRAWFORD SQUARE COLOUR CHANGE OYSTER

FEATURES


- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Double Insulated
- 3 Year Warranty

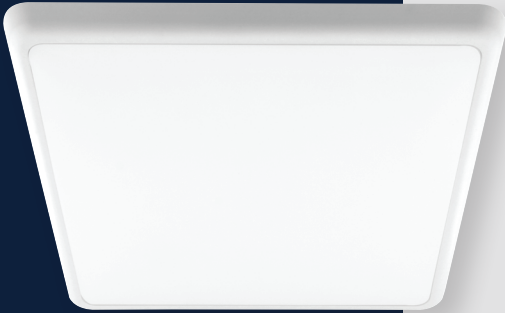


Luminous Intensity Distribution Diagrams

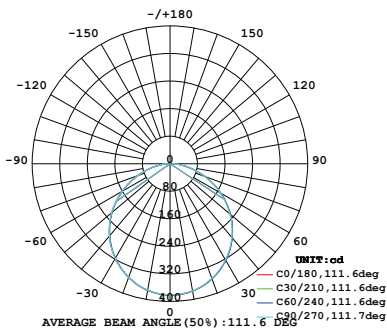

VOS1225 (3000K)

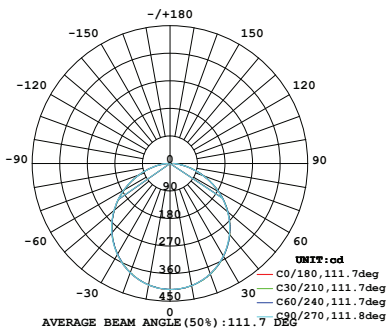

VOS1225 (4000K)

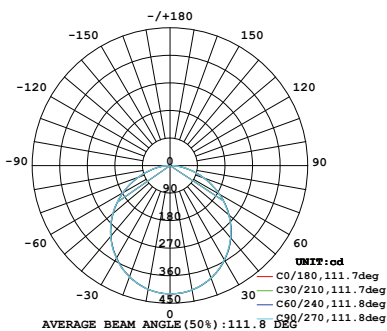


VOS1225 (5700K)

VOS1225	
Efficacy	100lm/W
Lumen Output	1200-1330lm
Power	12W
IP Rating	IP54
UGR	>19
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	Polycarbonate
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
ICF/ IC-4 Tested	N/A
Beam Angle	120°
Approvals & Certificates	SAA / LM80
LED Lifetime	40,000hrs
FITTING DIMENSIONS	

Height	250mm
Width	250mm
Depth	50mm


VOS1830 / CRAWFORD SQUARE COLOUR CHANGE OYSTER

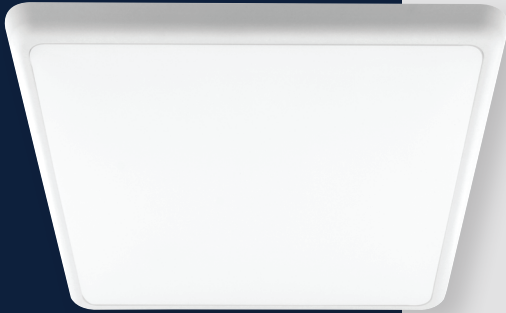


FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Double Insulated
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

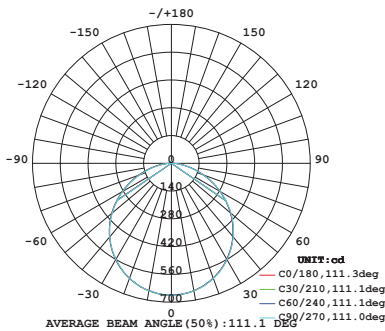

VOS1830 (3000K)

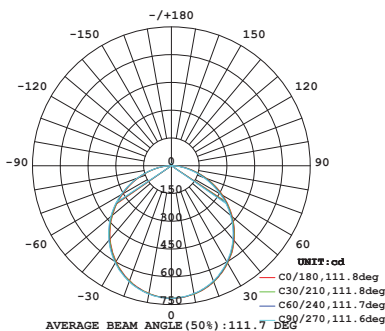

VOS1830 (4000K)

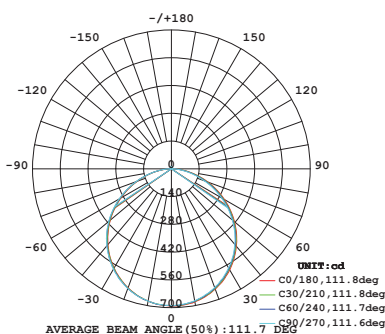


VOS1830 (5700K)

VOS1830	
Efficacy	110lm/W
Lumen Output	1800-1995lm
Power	18W
IP Rating	IP54
UGR	>19
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	Polycarbonate
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
ICF/ IC-4 Tested	N/A
Beam Angle	120°
Approvals & Certificates	SAA / LM80
LED Lifetime	40,000hrs
FITTING DIMENSIONS	

Height	300mm
Width	300mm
Depth	40mm


VOS2530 / CRAWFORD SQUARE COLOUR CHANGE OYSTER

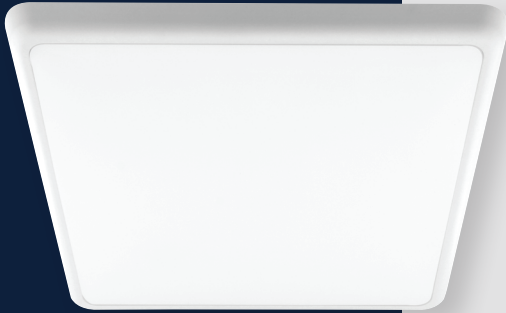


FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Double Insulated
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

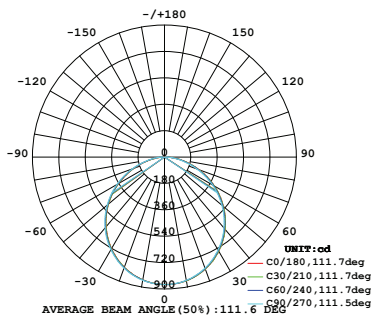

VOS2530 (3000K)

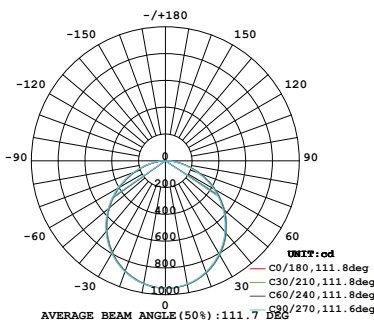

VOS2530 (4000K)

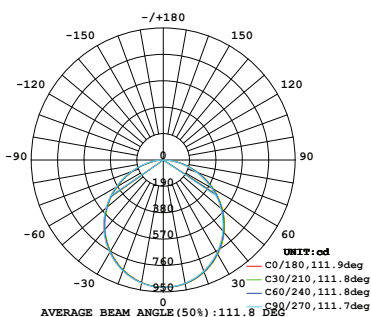

VOS2530 (5700K)

VOS2530

Efficacy	110lm/W
Lumen Output	2500-2775lm
Power	25W
IP Rating	IP54
UGR	>19
Dimming	Dimmable
Color Temperature	3000K, 4000K, & 5700K
CRI	80+
Construction Material	Polycarbonate
Operating Temperature	-25°C to +45°C
Input Voltage	200-240V AC
ICF/ IC-4 Tested	N/A
Beam Angle	120°
Approvals & Certificates	SAA / LM80
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Height	300mm
Width	300mm
Depth	40mm