




MCQUEEN RANGE

MCQUEEN33 / MCQUEEN SINGLE COLOUR DOWNLIGHT

FEATURES

- Slim 31mm body that fits easily under trusses
- Single colour 3000K
- Dimmable
- 3 Year Warranty

Luminous Intensity Distribution Diagrams

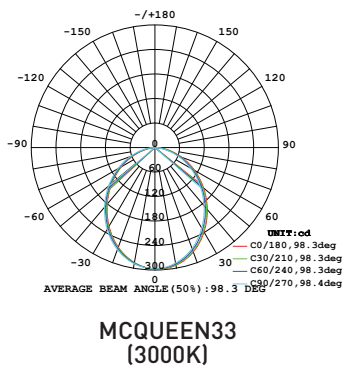

MCQUEEN33

Style	Flush
Lumen Output	700lm
Power	8W
Efficacy	90lm/W
Input Voltage	200-240V AC
Color Temperature	3000K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP44 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 104mm
Depth	31mm
Cut-Out	Ø 90-95mm




MCQUEEN RANGE

M33R / MCQUEEN RECESSED DOWNLIGHT

FEATURES

- Slim 38mm body that fits easily under trusses
- Single colour 3000K
- Dimmable
- 3 Year Warranty

Luminous Intensity Distribution Diagrams

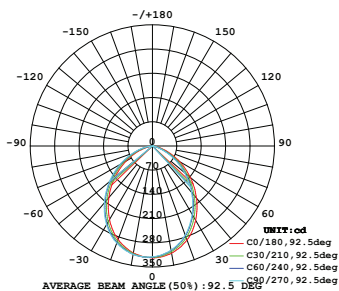

M33R (3000K)

M33R

Style	Recessed
Lumen Output	700lm
Power	8W
Efficacy	90lm/W
Input Voltage	200-240V AC
Color Temperature	3000K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP44 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 110mm
Depth	38mm
Cut-Out	Ø 90-100mm




MCQUEEN RANGE

MCQUEEN3 / MCQUEEN COLOUR CHANGE DOWNLIGHT


FEATURES

- Slim 31mm body that fits easily under trusses
- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

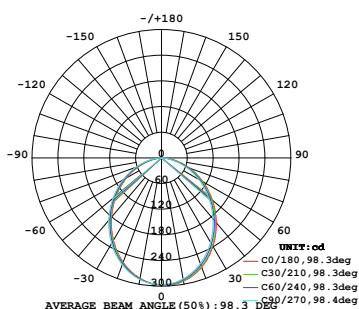

MCQUEEN3
(3000K)

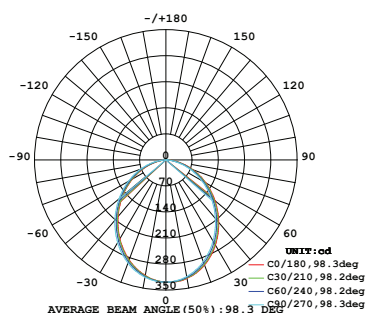

MCQUEEN3
(4000K)

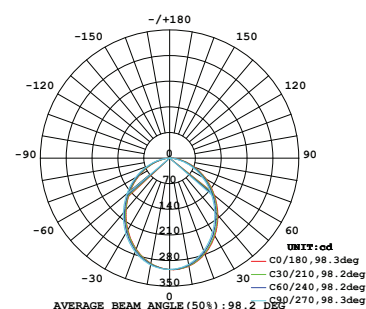

MCQUEEN3
(5700K)

MCQUEEN3


Style	Flush
Lumen Output	700-750lm
Power	8W
Efficacy	90lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP44 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS


Diameter	Ø 104mm
Depth	31mm
Cut-Out	Ø 90-95mm




Luminous Intensity Distribution Diagrams

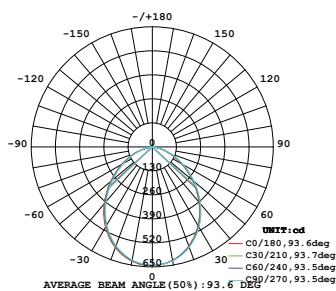

M4 (3000K)

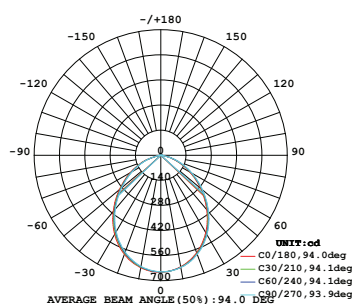

M4 (4000K)

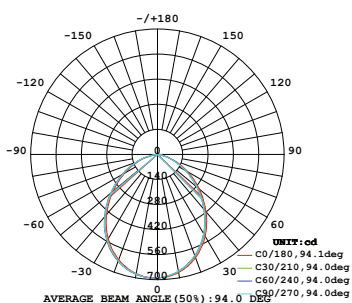

M4(5700K)

MCQUEEN RANGE

M4 / MCQUEEN COLOUR CHANGE DOWNLIGHT

FEATURES

- Slim 31mm body that fits easily under trusses
- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty

M4

Style	Flush
Lumen Output	900-1000lm
Power	12W
Efficacy	80lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	100°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP44 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 130mm
Depth	31mm
Cut-Out	Ø 105-110mm




MCQUEEN RANGE

M3R / MCQUEEN RECESSED DOWNLIGHT


FEATURES

- Slim 38mm body that fits easily under trusses
- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

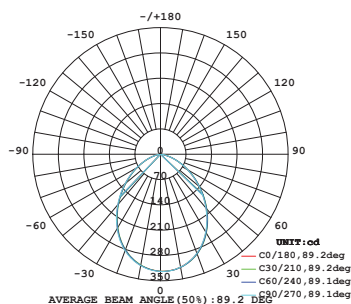

M3R (3000K)

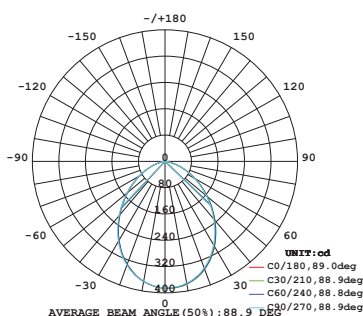

M3R (4000K)

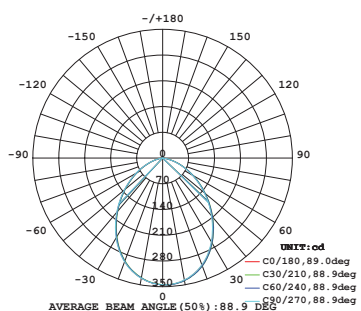

M3R (5700K)

M3R

Style	Recessed
Lumen Output	700-750lm
Power	8W
Efficacy	90lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP44 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 110mm
Depth	38mm
Cut-Out	Ø 90-100mm




M5R / MCQUEEN RECESSED DOWNLIGHT

FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Includes flex & plug
- 3 Year Warranty



Luminous Intensity Distribution Diagrams

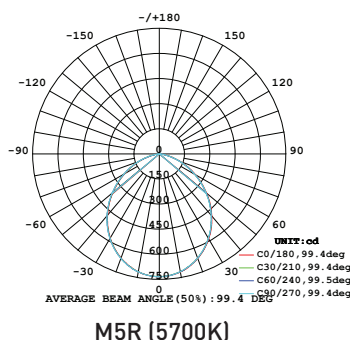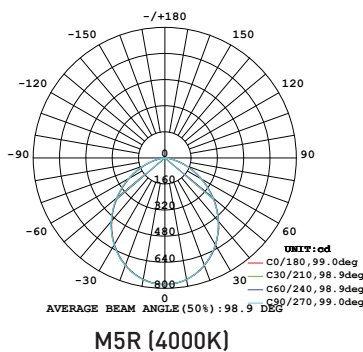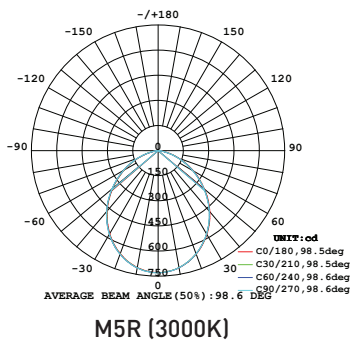

M5R

Style	Recessed
Lumen Output	1380-1580lm
Power	15W
Efficacy	105lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP54 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 145mm
Depth	45mm
Cut-Out	Ø 120-130mm


M6R / MCQUEEN RECESSED DOWNLIGHT

FEATURES


- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Includes flex & plug
- 3 Year Warranty




Luminous Intensity Distribution Diagrams

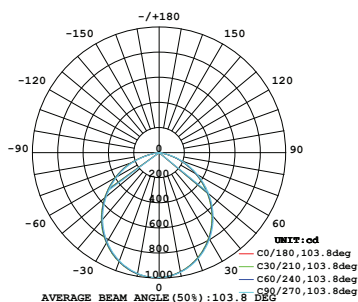

M6R (3000K)

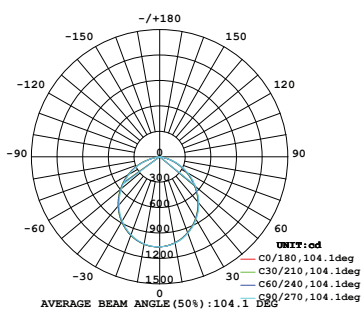

M6R (4000K)

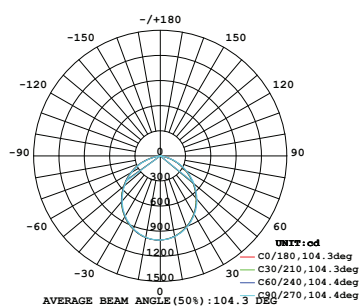

M6R (5700K)

M6R

Style	Recessed
Lumen Output	1800-1980lm
Power	18W
Efficacy	110lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP54 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 170mm
Depth	45mm
Cut-Out	Ø 140-150mm


M8R / MCQUEEN RECESSED DOWNLIGHT

FEATURES


- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty




Luminous Intensity Distribution Diagrams

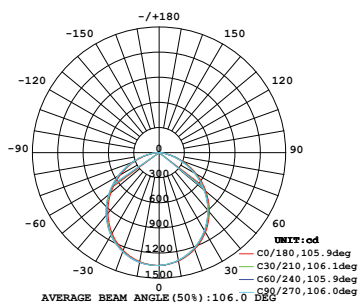

M8R (3000K)

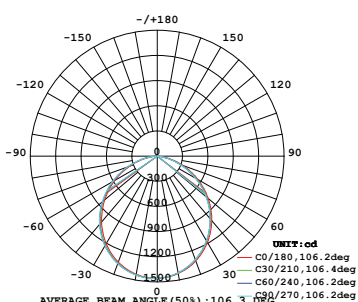

M8R (4000K)

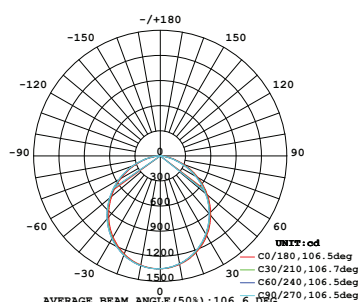

M8R (5700K)

M8R

Style	Recessed
Lumen Output	3500-4000lm
Power	35W
Efficacy	110lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP54 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 228mm
Depth	45mm
Cut-Out	Ø 200-210mm


M3G / MCQUEEN GIMBLE DOWNLIGHT

FEATURES


- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty




Luminous Intensity Distribution Diagrams

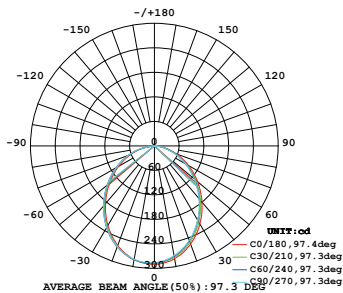

M3G (3000K)

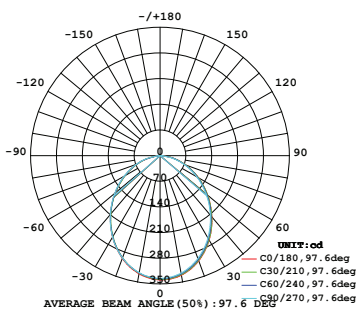

M3G (4000K)

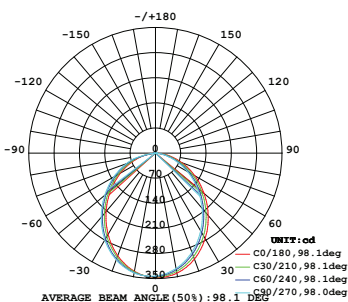

M3G (5700K)

M3G

Style	Gimble
Lumen Output	700-800lm
Tilt	25°
Power	10W
Efficacy	80lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP20 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	White
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 104mm
Depth	31mm
Cut-Out	Ø 90-95mm




MCQUEEN RANGE

M3GB / MCQUEEN GIMBLE DOWNLIGHT


FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

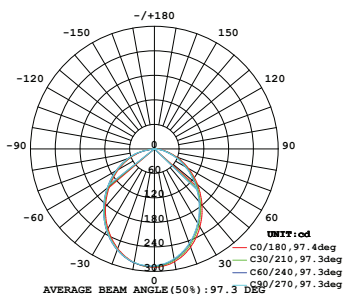

M3GB(3000K)

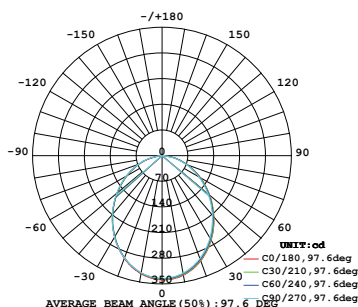

M3GB (4000K)

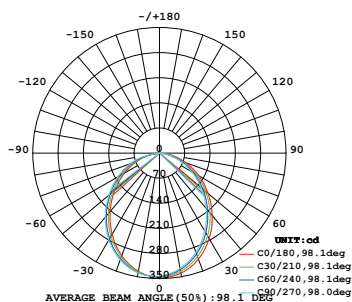

M3GB (5700K)

M3GB

Style	Gimble
Lumen Output	700-800lm
Tilt	25°
Power	10W
Efficacy	80lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP20 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	Black
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 104mm
Depth	31mm
Cut-Out	Ø 90-95mm




MCQUEEN RANGE

M3RB / MCQUEEN RECESSED DOWNLIGHT


FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

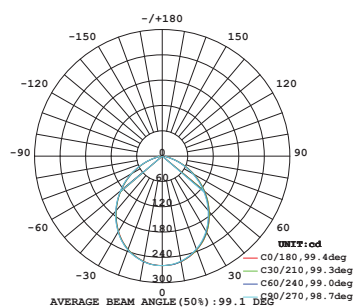

M3RB (3000K)

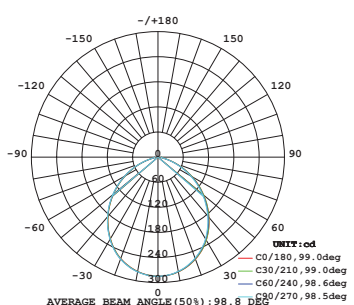

M3RB (4000K)

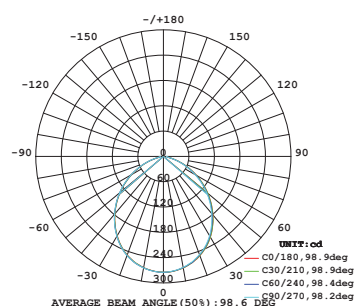

M3RB (5700K)

M3RB

Style	Recessed
Lumen Output	700-750lm
Power	8W
Efficacy	90lm/W
Input Voltage	200-240V AC
Color Temperature	3000/4000/5700K
Dimming	Yes
Beam Angle	90°
CRI	80+
Construction Material	Aluminium
Operating Temperature	-25°C to +45°C
IP Rating	IP44 (Front Only)
ICF/ IC-4 Tested	IC-4/IC-F
Colour	Black
Approvals & Certificates	SAA for driver
Class	Class 2
LED Lifetime	40,000hrs

FITTING DIMENSIONS

Diameter	Ø 110mm
Depth	38mm
Cut-Out	Ø 90-100mm