


2CS1W / 2CS1B - CARD SWITCH

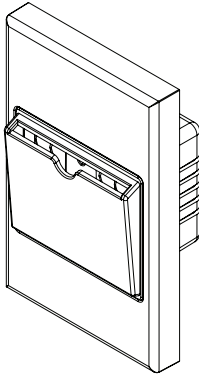

SAFETY

This product must be installed with the card slot facing upwards. Do not install horizontally or facing downwards. This keycard switch is required to be protected by a 16A MCB or RCBO.

This product complies in full with AS/NZS 60669.1. This product should be installed by a suitably qualified person in accordance with Australian and New Zealand wiring rules.

SPECIFICATIONS

Input Voltage	250V AC, 50Hz
Rated Current	16A Resistive
Minimum Load	0A
Contacts	1xN/0

SWITCHING

Electronic switch activated with standard sized card, specific card not required.

Switch On: Instant switching on insertion of card.
Switch Off: 1 minute after card is removed (time interval not adjustable).

INSTALLATION PROCEDURE

STEP 1

Card switch is designed for installation into a flush box or similar location secured with two fixing screws.

STEP 2

Ensure the relevant circuits are isolated and safe prior to installation.

STEP 3

Cut out flush box opening.

STEP 4

Terminate wiring to card switch.

STEP 5

Secure card switch into flush box with two securing screws (supplied). Then clip on fascia cover.

WARRANTY

This product is covered by the standard 5 Year Vynco Warranty - proof of purchase is required. Please contact Vynco for details of returns procedure.


NOTE: This product contains NO user serviceable parts.

WIRING

L = Live or Phase - Brown or Red

N = Neutral - Blue or Black

LOAD = Load Live or Phase - Brown or Red

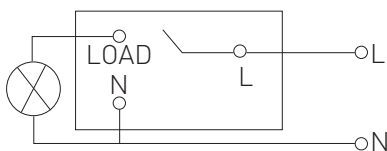

VYNCO INDUSTRIES (NZ) LIMITED

CHRISTCHURCH

388 Tuam Street, Phillipstown, Christchurch, 8011
PO Box 9022, Tower Junction, Christchurch 8149
New Zealand
P +64 3 379 9283 F +64 3 379 6838
E sales@vynco.co.nz

VYNCO.CO.NZ

AUCKLAND

9 Levene Place, Mount Wellington
PO Box 12 249, Penrose, Auckland 1061
New Zealand
P +64 9 525 6051 F +64 9 525 5799