


### 2S11P / 2S21P - HOME IP56 SWITCH



#### SPECIFICATIONS

Rated Voltage	250V AC
Rated Frequency	50Hz
Rated Current	16A
Operational Temp.	-10°C to +40°C
IP Rating	IP56
Colour	White
Available Configurations	1G, 2G
Switch Arrangement	Single Pole / 2 Way
Mounting Orientation	Vertical Only

#### SAFETY

This product complies in full with AS/NZS 3133. This product should be installed by a suitably qualified person in accordance with Australian and New Zealand wiring rules.

#### WARRANTY

This product is covered by the standard 3 Year Vynco Warranty - proof of purchase is required. Please contact Vynco for details of returns procedure.

**NOTE:** This product contains NO user serviceable parts.

#### INSTALLATION PROCEDURE


**NOTE:** IP56 switches can only be mounted vertically (portrait orientation), and the switch mech must not be removed.

##### STEP 1

Ensure wall surface for mounting is smooth and flat and the hole cut does not exceed switch sub-plate seal perimeter size.

##### STEP 2

Remove the screw cap bungs (circled below) from the sub-plate seal with side cutters, cutting close to the bung itself. Store for later.

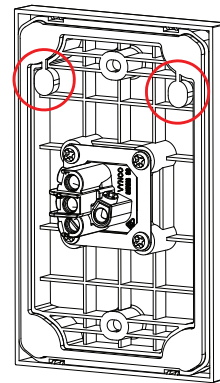

##### STEP 3

Wire up the switch in accordance with the AS/NZS 3000 Wiring Rules.

##### STEP 4

Screw the switch to the wall up to a torque of 1.3Nm for each screw (whether flush box mounting or solid wall mounting). In the case of solid wall mounting, piercing the seal flange is okay and recommended.

##### STEP 5

Fit the screw seal bungs in flush box screw holes. Fit cover plate.

#### VYNCO INDUSTRIES (NZ) LIMITED

##### CHRISTCHURCH

388 Tuam Street, Phillipstown, Christchurch, 8011  
 PO Box 9022, Tower Junction, Christchurch 8149  
 New Zealand  
 P +64 3 379 9283 F +64 3 379 6838  
 E sales@vynco.co.nz

**VYNCO.CO.NZ**

##### AUCKLAND

9 Levene Place, Mount Wellington  
 PO Box 12 249, Penrose, Auckland 1061  
 New Zealand  
 P +64 9 525 6051 F +64 9 525 5799