


LOC275 OCEAN LED ROUND OYSTER LIGHT

FEATURES


- Made from recycled & bio plastics
- Colour-Change LED (3000K/4000K/5700K)
- IP54 Rated
- 3 level adjustable wattage for better energy efficiency




Luminous Intensity Distribution Diagrams

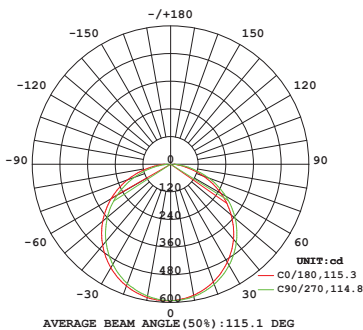

LOC275 (3000K)

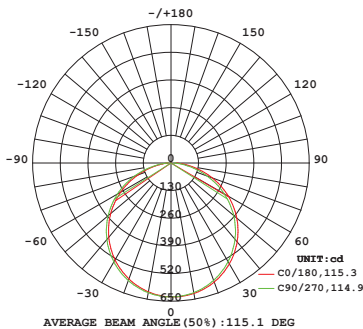

LOC275 (4000K)

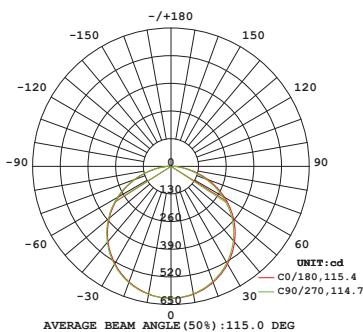

LOC275 (5700K)

LOC275

Power	6W, 12W, 18W
Input Voltage	100-240V AC
Lumen Output	660lm, 1320lm, 1980lm
Efficacy	110lm/W
Color Temperature	3000K, 4000K, & 5700K
Beam Angle	120°
CRI	>80
Operating Temperature	-20°C to +45°C
LED Lifetime	>50,000hrs
Construction Material	Polycarbonate
IP Rating	IP54
IK Rating	IK08
Approvals & Certificates	AS/NZS 60598, AS CISPR 15:2017

Dimming No

FITTING DIMENSIONS

Diameter	Ø 275mm
Depth	48mm


LOC350 OCEAN LED ROUND OYSTER LIGHT

FEATURES


- Made from recycled & bio plastics
- Colour-Change LED (3000K/4000K/5700K)
- IP54 Rated
- 3 level adjustable wattage for better energy efficiency




Luminous Intensity Distribution Diagrams

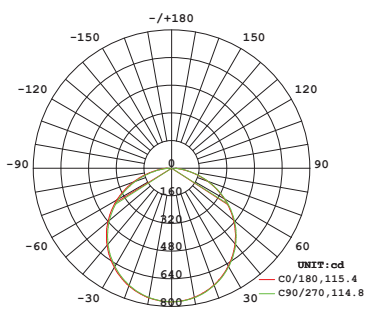

LOC350 (3000K)

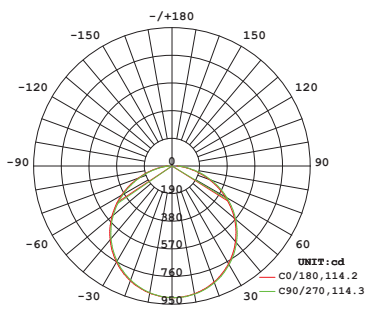

LOC350 (4000K)

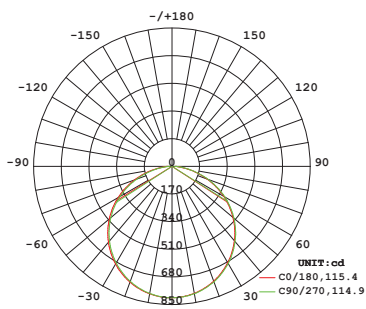

LOC350 (5700K)

LOC350

Power	15W, 20W, 24W
Input Voltage	100-240V AC
Lumen Output	1650lm, 2200lm, 2640lm
Efficacy	110lm/W
Color Temperature	3000K, 4000K, & 5700K
Beam Angle	120°
CRI	>80
Operating Temperature	-20°C to +45°C
LED Lifetime	>50,000hrs
Construction Material	Polycarbonate
IP Rating	IP54
IK Rating	IK08
Approvals & Certificates	AS/NZS 60598, AS CISPR 15:2017

Dimming No

FITTING DIMENSIONS

Diameter	Ø 350mm
Depth	48mm