


2CS1W/2CS1B CARD SWITCH

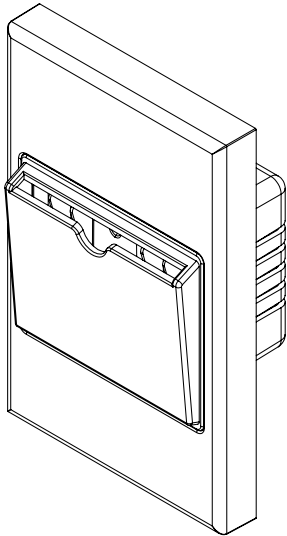

SPECIFICATIONS	
Power	250V a.c.50 Hz
Rated Current	16A Resistive
Minimum Load	0A
Complies with	AS/NZS 606691= 2013, AS/NZSPR15 = 2009
Contacts	1×N/O

SWITCHING

Electronic switch activated with standard sized card, specific card not required.
 Switch On – Instant switching on insertion of card.
 Switch Off – 1 minute after card is removed (non adjustable).

CAUTION

This product must be installed with the card slot facing upwards.
 Do not install horizontally or facing downwards.
 This keycard switch is required to be protected by a 16A MCB or RCBO.

INSTALLER INSTRUCTIONS

This product should be installed by a suitably qualified person in accordance with Australian and New Zealand Wiring rules.


1. Card switch is designed for installation into a flush box or similar location secured with two fixing screws.
2. Ensure the relevant circuits are isolated and safe prior to installation.
3. Cut out flush box opening.
4. Terminate wiring to card switch.
5. Secure card switch into flush box with two securing screws (supplied).
6. Clip on fascia cover.

Wiring

L = Live or Phase – Brown or Red

N = Neutral – Blue or Black

LOAD = Load Live or Phase – Brown or Red

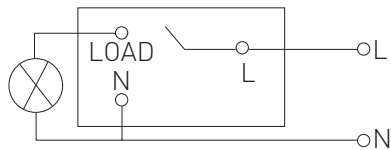

WARRANTY STATEMENT

This product is covered by the standard 5 year Vynco Warranty - proof of purchase is required.
 Please contact Vynco for details of returns procedure.
 NOTE: This product contains NO user serviceable parts.

Vynco Industries (NZ) Limited

Christchurch Office

388 Tuam Street, Phillipstown, Christchurch, 8011
 PO Box 9022, Tower Junction, Christchurch 8149
 New Zealand
 P +64 3 379 9283 F +64 3 379 6838
 E sales@vynco.co.nz
 www.vynco.co.nz

Auckland Office

9 Levene Pl, Mount Wellington
 PO Box 12 249, Penrose, Auckland 1061
 New Zealand
 P +64 9 525 6051 F +64 9 525 5799
 E sales@vynco.co.nz
 www.vynco.co.nz