


OLSEN245 / OLSEN445 / OLSEN545 - DUAL COLOUR INTERIOR BATTEN

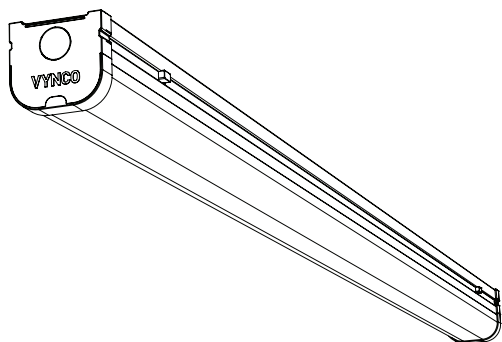

SPECIFICATIONS

Input Voltage	100 - 240V AC
Colour Temperature	4000K / 5700K
IP Rating	IP20
IK Rating	IK08
LED Lifetime Hours	50,000
Material	Aluminium and PC

DIMENSIONS

OLSEN245	600 x 71 x 63mm
OLSEN445	1200 x 71 x 63mm
OLSEN545	1500 x 71 x 63mm

SAFETY

Turn off power before installation or before doing any maintenance work. Turn off power before setting or changing CCT colour mode switch. Do not install any luminaire near a heat source.

For indoor use only. Do not install this luminaire in damp or wet locations.

Do not exceed the nominal supply voltage or amperage ratings.

Take care not to pull any electrical wires during unpacking as this may damage the connection.

Lay out all the components on a smooth surface and make sure there are no components missing before assembling.

To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting the power.

This product should be installed by a suitably qualified person in accordance with Australian and New Zealand wiring rules.

WARRANTY

This product is covered by the standard 3 Year Vynco Warranty - proof of purchase is required. Please contact Vynco for details of returns procedure.

NOTE: This product contains NO user serviceable parts.

VYNCO INDUSTRIES (NZ) LIMITED

CHRISTCHURCH

388 Tuam Street, Phillipstown, Christchurch, 8011
PO Box 9022, Tower Junction, Christchurch 8149
New Zealand
P +64 3 379 9283 F +64 3 379 6838
E sales@vynco.co.nz

VYNCO.CO.NZ

AUCKLAND

9 Levene Place, Mount Wellington
PO Box 12 249, Penrose, Auckland 1061
New Zealand
P +64 9 525 6051 F +64 9 525 5799

OLSEN245 / OLSEN445 / OLSEN545 - DUAL COLOUR INTERIOR BATTEN

INSTALLATION PROCEDURE

STEP 1

Isolate mains power.

STEP 2

Press snap-on buttons and remove diffuser.

STEP 3

Unplug power connection.

STEP 4

Feed mains cable through grommet in base tray / conduit side entry according to desired application.

STEP 5

Mark and drill fixing holes.

STEP 6

Securely fix base to the ceiling.

STEP 7

Terminate mains cable into terminal block and securely clamp.

STEP 8

Connect the DC plug, select colour temperature.

STEP 9

Fix cover to base and ensure all 4 clips engage.

STEP 10

Restore mains power and test to ensure correct operation.

