

SH cable holder



Areas of application:

For the multiple carrying of up to 30 sheathed cables with \varnothing 10 mm.

Installation guide:

- Drill a 6mm \varnothing hole
- Put the SH in the drill hole
- Insert cable/s into the SH
- Close the locking tab of the SH
- If required up to two EC clamps, in any pipe diameter size can be attached directly to the SH

Product details:

Cable capacity*	Type	Content part/box	Article number
max. 15	SH 15	150 / 400	30520
max. 30	SH 30	70 / 200	30540

* based on NYM 3 x 1.5 mm²

Product benefits/properties:

Even when installed, the cable holder can be easily opened and closed again. This allows cables to be easily added and removed. In tight areas, the SH 15 can be rotated up to 90° and installed with our Dowel Fastening Nail - DSN. There is the option to fit the Schnabl EC Euro clip on to the SH cable holder.

Technical data:

Material	halogen-free, PP, light grey, UV stabilised, temperature range: -10 °C to +85 °C, silicon-free
----------	--

Height without dowel 8.5 cm

Width (closed) 5 cm (SH 15), 9.8 cm (SH 30)


Weight per piece** 16.4 g, 27.7 g

Maximum load SH 15: 170 N concrete, 150 N solid brick
SH 30: 170 N concrete, 150 N solid brick

Breaking load SH 15: 292.80 N concrete, 282.20 N solid brick
SH 30: 272.20 N concrete, 311.10 N solid brick

EAN codes** 9008439-305209, 9008439-305407

** Listed in product overview order

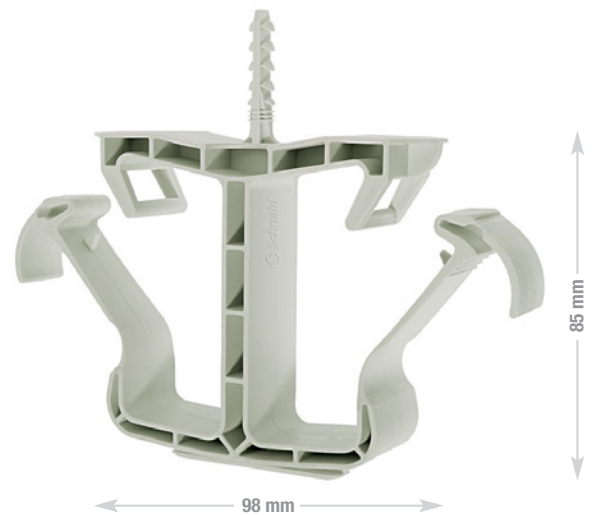

The SH holder forms a closed ring around the sheathed cables and can be re-opened using a handle.

Schnabl Stecktechnik GmbH
Bahnhofplatz 1, 3100 St. Pölten, Austria
Telephone +43 (0) 2742/221 67-0, Fax +43 (0) 2742/221 67-50
office@schnabl-steck.at, www.schnabl-steck.at

 **Schnabl**[®]