




MCQUEEN33 / MCQUEEN SINGLE COLOUR DOWNLIGHT

FEATURES

- Slim 31mm body that fits easily under trusses
- Single colour 3000K
- Dimmable
- 3 Year Warranty

Luminous Intensity Distribution Diagrams



MCQUEEN33
(3000K)

| MCQUEEN33 | |
|--------------------------|-------------------|
| Style | Flush |
| Lumen Output | 700lm |
| Power | 8W |
| Efficacy | 90lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000K |
| Dimming | Yes |
| Beam Angle | 90° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP44 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | White |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |
| FITTING DIMENSIONS | |
| Diameter | Ø 104mm |
| Depth | 31mm |
| Cut-Out | Ø 90-95mm |




MCQUEEN RANGE

M33R / MCQUEEN RECESSED DOWNLIGHT

FEATURES

- Slim 38mm body that fits easily under trusses
- Single colour 3000K
- Dimmable
- 3 Year Warranty

Luminous Intensity Distribution Diagrams



M33R (3000K)

| M33R | |
|--------------------------|-------------------|
| Style | Recessed |
| Lumen Output | 700lm |
| Power | 8W |
| Efficacy | 90lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000K |
| Dimming | Yes |
| Beam Angle | 90° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP44 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | White |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |
| FITTING DIMENSIONS | |
| Diameter | Ø 110mm |
| Depth | 38mm |
| Cut-Out | Ø 90-100mm |




MCQUEEN RANGE

MCQUEEN3 / MCQUEEN COLOUR CHANGE DOWNLIGHT


FEATURES

- Slim 31mm body that fits easily under trusses
- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty


Luminous Intensity Distribution Diagrams

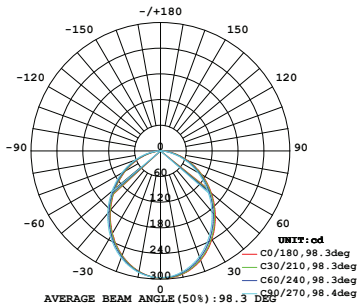

**MCQUEEN3
(3000K)**

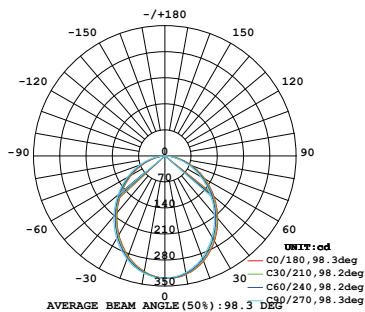

**MCQUEEN3
(4000K)**

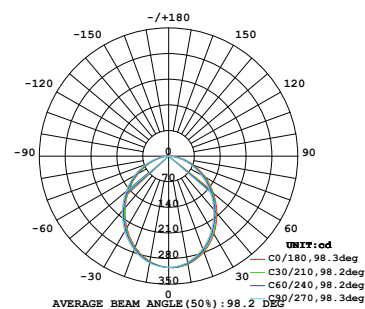

**MCQUEEN3
(5700K)**

| MCQUEEN3 | |
|--------------------------|-------------------|
| Style | Flush |
| Lumen Output | 700-750lm |
| Power | 8W |
| Efficacy | 90lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000/4000/5700K |
| Dimming | Yes |
| Beam Angle | 90° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP44 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | White |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |
| FITTING DIMENSIONS | |
| Diameter | Ø 104mm |
| Depth | 31mm |
| Cut-Out | Ø 90-95mm |




MCQUEEN RANGE

M4 / MCQUEEN COLOUR CHANGE DOWNLIGHT


FEATURES

- Slim 31mm body that fits easily under trusses
- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty


Luminous Intensity Distribution Diagrams



M4 (3000K)



M4 (4000K)



M4(5700K)

| M4 | |
|--------------------------|-------------------|
| Style | Flush |
| Lumen Output | 900-1000lm |
| Power | 12W |
| Efficacy | 80lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000/4000/5700K |
| Dimming | Yes |
| Beam Angle | 100° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP44 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | White |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |
| FITTING DIMENSIONS | |
| Diameter | Ø 130mm |
| Depth | 31mm |
| Cut-Out | Ø 105-110mm |






M3R / MCQUEEN RECESSED DOWNLIGHT

FEATURES

- Slim 38mm body that fits easily under trusses
- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty

Luminous Intensity Distribution Diagrams

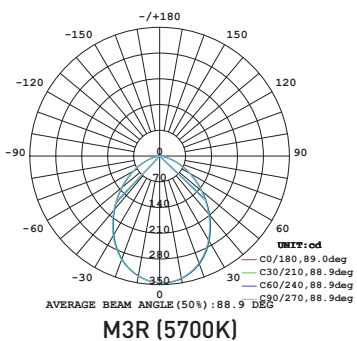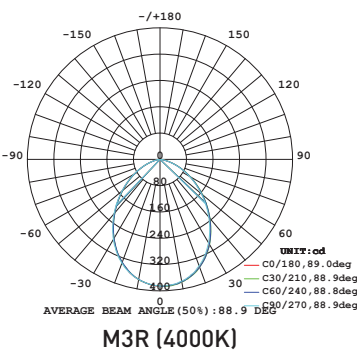

| M3R | |
|--------------------------|-------------------|
| Style | Recessed |
| Lumen Output | 700-750lm |
| Power | 8W |
| Efficacy | 90lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000/4000/5700K |
| Dimming | Yes |
| Beam Angle | 90° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP44 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | White |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |

| FITTING DIMENSIONS | |
|--------------------|------------|
| Diameter | Ø 110mm |
| Depth | 38mm |
| Cut-Out | Ø 90-100mm |




M6R / MCQUEEN RECESSED DOWNLIGHT

FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- Includes flex & plug
- 3 Year Warranty



Luminous Intensity Distribution Diagrams

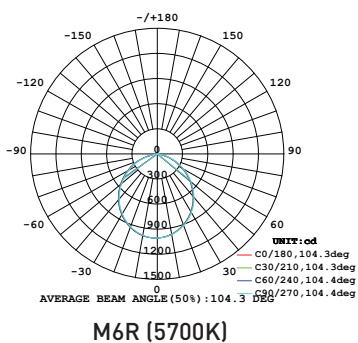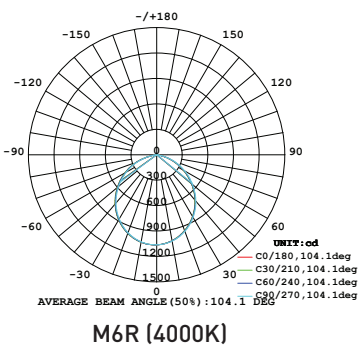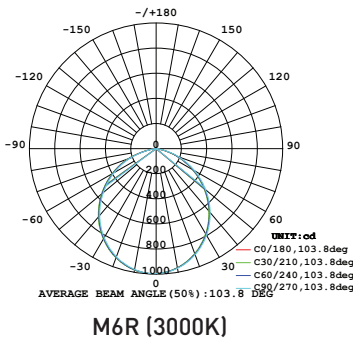

| M6R | |
|--------------------------|-------------------|
| Style | Recessed |
| Lumen Output | 1800-1980lm |
| Power | 18W |
| Efficacy | 110lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000/4000/5700K |
| Dimming | Yes |
| Beam Angle | 90° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP54 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | White |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |

| FITTING DIMENSIONS | |
|--------------------|-------------|
| Diameter | Ø 170mm |
| Depth | 45mm |
| Cut-Out | Ø 140-150mm |


M3G / MCQUEEN GIMBLE DOWNLIGHT

FEATURES


- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty




Luminous Intensity Distribution Diagrams



M3G (3000K)

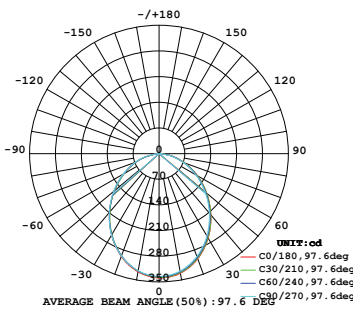

M3G (4000K)



M3G (5700K)

| M3G | |
|--------------------------|-------------------|
| Style | Gimble |
| Lumen Output | 700-800lm |
| Tilt | 25° |
| Power | 10W |
| Efficacy | 80lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000/4000/5700K |
| Dimming | Yes |
| Beam Angle | 90° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP20 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | White |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |
| FITTING DIMENSIONS | |
| Diameter | Ø 104mm |
| Depth | 31mm |
| Cut-Out | Ø 90-95mm |






MCQUEEN RANGE

M3GB / MCQUEEN GIMBLE DOWNLIGHT

FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty

Luminous Intensity Distribution Diagrams

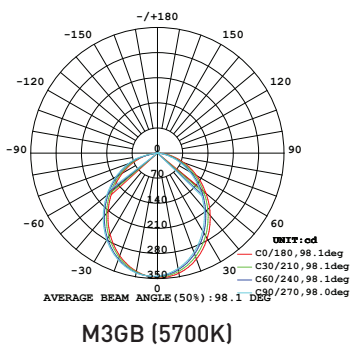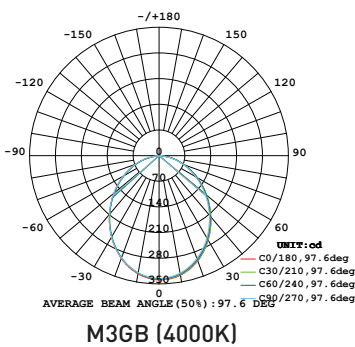

| M3GB | |
|--------------------------|-------------------|
| Style | Gimble |
| Lumen Output | 700-800lm |
| Tilt | 25° |
| Power | 10W |
| Efficacy | 80lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000/4000/5700K |
| Dimming | Yes |
| Beam Angle | 90° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP20 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | Black |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |
| FITTING DIMENSIONS | |
| Diameter | Ø 104mm |
| Depth | 31mm |
| Cut-Out | Ø 90-95mm |




M3RB / MCQUEEN RECESSED DOWNLIGHT


FEATURES

- Colour-Change LED (3000K/4000K/5700K)
- Dimmable
- 3 Year Warranty


Luminous Intensity Distribution Diagrams



M3RB (3000K)



M3RB (4000K)



M3RB (5700K)

| M3RB | |
|--------------------------|-------------------|
| Style | Recessed |
| Lumen Output | 700-750lm |
| Power | 8W |
| Efficacy | 90lm/W |
| Input Voltage | 200-240V AC |
| Color Temperature | 3000/4000/5700K |
| Dimming | Yes |
| Beam Angle | 90° |
| CRI | 80+ |
| Construction Material | Aluminium |
| Operating Temperature | -25°C to +45°C |
| IP Rating | IP44 (Front Only) |
| ICF/ IC-4 Tested | IC-4/IC-F |
| Colour | Black |
| Approvals & Certificates | SAA for driver |
| Class | Class 2 |
| LED Lifetime | 40,000hrs |

| FITTING DIMENSIONS | |
|--------------------|------------|
| Diameter | Ø 110mm |
| Depth | 38mm |
| Cut-Out | Ø 90-100mm |