

# PD Board anchor 9080



## Areas of application:

For the attachment of electrical equipment to plasterboard and Heraklith.

## Installation Guide:

- Push the PD with the point with your thumb into the gypsum board
- Hammer the PD into the board
- Fix the PD by screwing a 3,5 / 4.5 mm screw with a length of 30 mm into the board (screws are not in the product range)

## Product details:

Content pack/box	100 / 5,000
Screw Ø	3,5 - 4,5

## Mounting and usage instructions:


Hit the PD with a hammer into the plaster or Heraklith wall. By screwing in the screw, the anchor tightens into the braced wall and thus withstands tensile forces of 40 50 kg.

## Product benefits/properties:

Quick and easy installation of the PD with a hammer. Also during tightening of the fastener remains firmly anchored in the PD building material.

## Technical data:

Material	Spring band steel, galvanized
Weight per piece	2.00 g
Max. reccd. load	320 N (32 kg) plasterboard 15 mm, 650 N (65 kg) plasterboard 25 mm, 80 N (8 kg) Heraklith (Tightening torques are averages and can vary greatly due to various influences!)
Breaking load	459.5 N (45.9 kg) plasterboard 15 mm, 933 N (93 kg) plasterboard 25 mm, 115.70 N (11.5 kg) Heraklith (Tightening torques are averages and can vary greatly due to various influences!)
EAN-Code	9 008439 090808

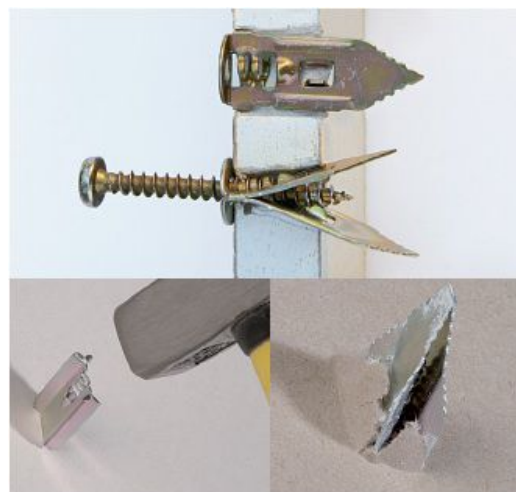

Using the PD Board anchor to attach the EC Euro clip easily on plasterboard and even on Heraklith.

Schnabl UK Limited  
Innovation Centre, Gallows Hill, Warwick, CV34 6UW, United Kingdom  
Phone +44 (0)1926 217 852, Fax +44 (0)1926 217 701, Mobile +44 (0)7500 835 025  
info@schnabl.co.uk, www.schnabl.co.uk

