




### P66 / P123 / P126 - GARCIA LED PANELS



**P66**

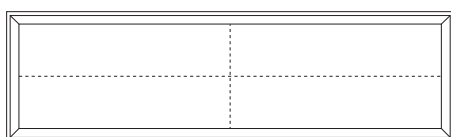

**P123**

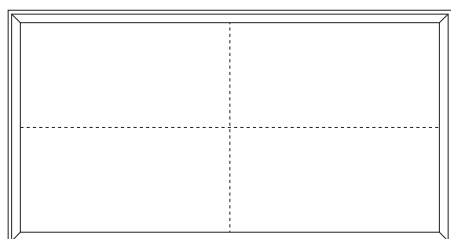

**P126**



**IP40**

#### SAFETY

Turn off power before installation or before doing any maintenance work.

Do not install any luminaire near a heat source. Take care not to pull any electrical wires during placement and installation.

All wiring and installation of the light fitting must adhere to AS/NZS 3000 wiring rules.

#### CLEANING

Periodic cleaning of the garcia panel is the only maintenance that is needed.

Ensure power is off.

Use only a damp lint free cloth to remove dust.

Avoid using chemical cleaners as some products degrade plastic material and can cause premature failure.

Do not use water when cleaning as it could damage components and create the possibility of an electrical shock.

#### WARRANTY

This product is covered by the standard 5 Year Vynco Warranty - proof of purchase is required. Please contact Vynco for details of returns procedure.

**NOTE:** This product contains NO user serviceable parts.

#### SPECIFICATIONS

Input Voltage	220 - 240V AC
Colour Temperature	4000K / 5700K
LED Lifetime Hours	40,000

#### DIMENSIONS

P66	595 x 595 x 9mm
P123	1195 x 295 x 9mm
P126	1195 x 595 x 9mm

#### VYNCO INDUSTRIES (NZ) LIMITED

##### CHRISTCHURCH

388 Tuam Street, Phillipstown, Christchurch, 8011  
PO Box 9022, Tower Junction, Christchurch 8149  
New Zealand  
P +64 3 379 9283 F +64 3 379 6838  
E sales@vynco.co.nz

**VYNCO.CO.NZ**

##### AUCKLAND

9 Levene Place, Mount Wellington  
PO Box 12 249, Penrose, Auckland 1061  
New Zealand  
P +64 9 525 6051 F +64 9 525 5799

---

### P66 / P123 / P126 - GARCIA LED PANELS

---

#### INSTALLATION PROCEDURE

Prepare an opening in the T-Bar system to suit the panel dimension.

##### STEP 1

Install a suitable standard three pin socket (240V AC, 10A) adjacent to the mounting point.

Note: Vynco Garcia drivers have a 1.5m flex and plug provided.

##### STEP 2

Drop the panel light into the T-Bar opening.

##### STEP 3

Connect the power supply to the panel connection with the polarized connector provided.

##### STEP 4

Connect power plug to socket. Switch on and test.

Note: Use only power supply provided. Use of non standard power supply will void warranty. Do not modify, bend, or drill the panel. This will void warranty and may create a serious hazard.

#### FITMENT

Vynco also offer a range of alternative mounting options for the Garcia Panels. These include:

<b>P66SK</b>	Surface Mount Kit for P66
<b>P123SK</b>	Surface Mount Kit for P123
<b>P126SK</b>	Surface Mount Kit for P126
<b>P66FK</b>	Flush Mount Kit for P66
<b>P123FK</b>	Flush Mount Kit for P123
<b>P126FK</b>	Flush Mount Kit for P126