
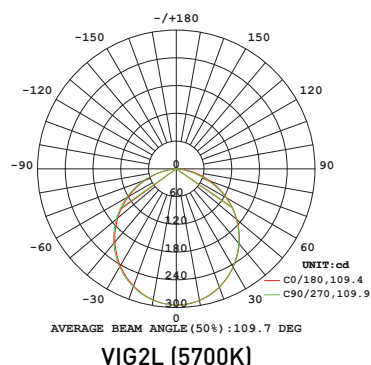
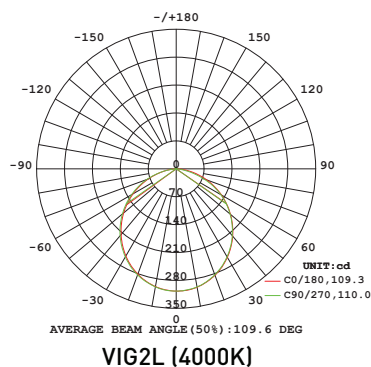


Luminous Intensity Distribution Diagrams

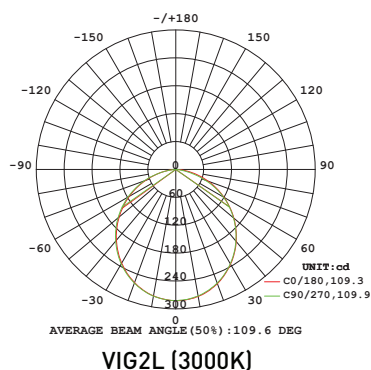

ILLUSION GRILLES RANGE

VIG2L / ILLUSION GRILLE WITH LIGHT

FEATURES

- Plaster fascia surround ensures no cracking and a seamless finish of plaster sticking to plaster
- Tapered spigot for easy duct tapping
- Fitting at first install - no need to return between install and fit off
- 5 Year Warranty

VIG2L

Grille Type	Flush Square Illuminated
Grille Material	Steel, Fiber Plaster, ABS
Grille Colour	Light: Frosted White
Power	10W
Colour Temperature	3000/4000/5700K
CRI	80+
LED Lifetime	40,000hrs
Dimming	Yes (TRIAC Dimming 8-10%)
Flicker Free	No
IP Rating	IP44 (Light), IP20 (Driver)
Approvals & Certificates	SAA (Driver)
IC-F/ IC-4 Tested	IC-F
Lumen Output	780-850lm
Efficacy	82-90lm/W
Beam Angle	120°
Class	Class 2
Operating Temperature	-20 to +45°C
Input Voltage	200-240V AC
Overall Size (HxWxD)	300 x 330 x 123mm
Duct Size	Ø 150mm
Cut-out Size	268 x 268mm