

### M3G & M3GB - MCQUEEN GIMBLE DOWNLIGHT

#### INSTALLATION & USE INSTRUCTIONS:

This product should only be installed by a licensed electrician in compliance with the requirements set out in AS/NZS 60598.2.2:2016 incorporating New Zealand only Amendment A.

#### Wiring Instructions: A = Phase; N = Neutral

- Ensure desired location is suitable and clear of all obstructions
- Cut hole with suitable tool - check hole size before cutting
- After ensuring circuit is isolated, terminate wiring in an approved manner
- Hold back the spring clips to insert in cut-out
- Release the clips and centre the fixture
- Position the light to the desired angle
- Energise and test
- Select colour range using switch  
**CW = 5700k; NW = 4000k; WW = 3000k**

#### WARRANTY:

3 Year Warranty - proof of purchase is required.

#### CLEARANCES FROM COMBUSTIBLE MATERIAL:

**RISK OF FIRE** - Required clearance from structural members and building elements.



**SCB = 0mm**  
**HCB = 0mm**

**MIC = 0mm**  
**SCI = 0mm**

This luminaire has been independently tested and is rated for IC-4 and IC-F installation.

This product is suitable for use with building insulation that can safely be continually exposed to temperatures up to 90°C and must withstand a 30s needle flame test carried out in accordance with AS/NZS 60695.11.5 with the flame applied to all surfaces of the sample.

Loose fill insulation as defined in NZS 4246 is not permitted to abut or cover this luminaire.

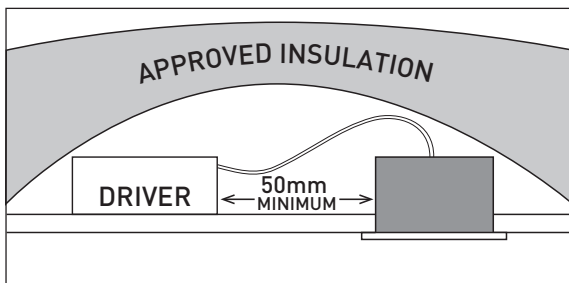

#### Vynco Industries (NZ) Limited

##### Christchurch Office

388 Tuam Street, Phillipstown, Christchurch, 8011  
PO Box 9022, Tower Junction, Christchurch 8149  
New Zealand  
P +64 3 379 9283 F +64 3 379 6838  
E sales@vynco.co.nz  
www.vynco.co.nz

##### Auckland Office

9 Levene Pl, Mount Wellington  
PO Box 12 249, Penrose, Auckland 1061  
New Zealand  
P +64 9 525 6051 F +64 9 525 5799  
E sales@vynco.co.nz  
www.vynco.co.nz