

SPECIFICATIONS

Suitable for ceiling mounting.
Aluminium housing and Polycarbonate cover.

Voltage: 230V a.c. 50Hz

Wattage: 50W

Luminaire Class: Class 1

Lumen Output: 6000 Lm

Colour Temperature: 4000K

Degree of Protection: IP20

(Suitable for indoor applications)

**IP20**

5535

WIRING

L=Live or Phase – Brown or Red

E=Earth – Green or Green/Yellow

N=Neutral – Blue or Black

DIMENSIONS

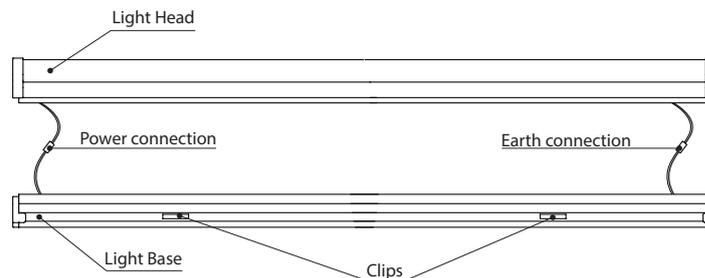
CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)
BT154	1500	102	83	2.69

SAFETY

This product should be installed by a suitably qualified person in accordance with Australian and New Zealand Wiring rules. Always disconnect the power to the fitting before opening the cover. In the case of lamp failure, disconnect from mains supply and return to Vynco for service.

WARRANTY

This product is covered by the standard 5 year Vynco Warranty - proof of purchase is required. Please contact Vynco for details of returns procedure. NOTE: This product contains NO user serviceable parts.

INSTALLATION

1. Ensure desired location is suitable and clear of all obstructions.
2. Depress the 4x clips to release the light head.
3. Unplug the power connection and earth strap to completely separate the light head from the light base.
4. After ensuring the relevant circuit is isolated and it is safe to do so, bring the supply cable through the centre cable entry into the light base.
5. Mount the light base securely using the supplied screws and plasterboard plugs (if appropriate).
6. Terminate the supply cable into the terminal block in an approved manner.
7. Securely clamp the supply cable with the cable clamp mounted in the light base.
8. Re-connect the power and earth connection between the light head and light base.
9. Ensure all cables are suitably positioned to avoid pinching and possible damage.
10. Align light head with light base and press home. Ensure that all 4x clips engage.
11. Test to ensure correct operation.